


# AC 501-6

Cummins  
Stamford  
D+ &



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$



2000/14/EC

& \$\$\$ # ( #

z \* \$ z ' z ' D :

	"	kw	"	kw	Amp
480/277		501,00		452,00	680,00
380/220		499,00		447,00	849,00
208/120		500,00		448,00	1554,00

fP GDE

GC ; ) &

) & z

fDF DE

%\$!

%

%&

GC " \$ (\*

z & (

GC

## Standard Specifications

z

fl

!

z

z

## ALTERNATOR

D; A Z ' 5J F


## TRANSFER SWITCH

Manufacturer		Cummins		
Model		QSX 15 G9		
		%	\$\$	"# "
		563,00 kw [755,00HP]		
	L	15,000		
	"	137 X 169		
		17:1		
	fl # ı	"# "	1800	
	L	91,00		
	L	66,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	43,00		
	' # "	109,00		
	° C	488,00		
		24 V d.c.		
	Load	%)\$ı	'+)ı	)\$ı
	# "			
		117,80	90,50	63,30

		Stamford		
		HCI 544 E		
	Hz	60		
	kw	600,00		
7cg'		0,80		
		3		
	fl ı	480/277		
	A	902,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 501-6	4185,00	3377,00	1550,00	2103,00	850,00
		fl ı		fl ı	
	"	"	"	"	L
MS 80	5185	4810	1606	2615	850

1 D+' &'

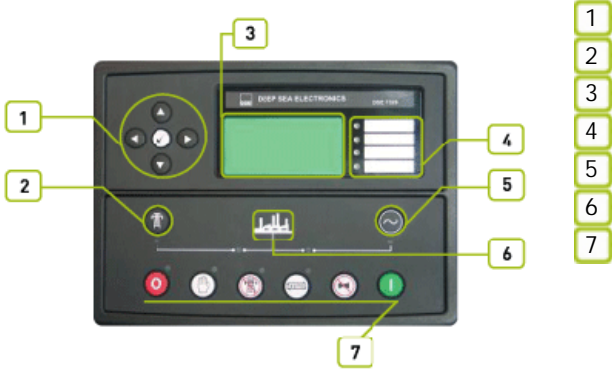

2

8G9ž +' &\$ž ) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

% &1 \*(' žFG&' &žFG(,) ž

f@z@Bl  
f%&!@t

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B\*\*\$-)\$

6G'9B\*\*%\$\$\$!\*!&

6G'9B\*\*%\$\$\$!\*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

z  
% , !&\*(

z  
&(\$)

z  
!&+"" z

# AC 501-6

Cummins  
Stamford  
D+ & "



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850