



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		400,00		336,00	505,00
380/220		365,00		332,00	630,00
208/120		400,00		336,00	1166,00

fP GDE

=GC ;) &

,) & z

fD F D L

% \$ i

%

% &

=GC " \$ (* *

z & (

=GC

Standard Specifications

(* # \$ \$

z

f l

!

E

z

z

1

ALTERNATOR

D: A Ž 5JF


TRANSFER SWITCH

Manufacturer		John Deere		
Model		6125 HF		
Epa		TIER II		
	L	12,50		
	"	127 X 165		
		17.0:1		
	fl # ı	"# "	1800	
	fl ı	L	42,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	34,00		
	' # "	91,00		
	° C	560		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "			
		94,50	69,20	47,70

		Stamford		
		HCI 444F		
	Hz	60		
	"	400		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	601		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD 400-6	3390	3150	1170	2050	330
		fl ı		fl ı	
	"	"	"	"	L
AK 70	4670	4560	1470	2300	650

1 D+' &'

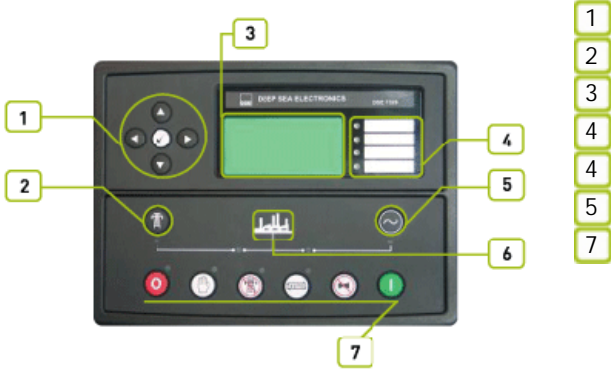

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

"8G9+' &\$ž &)' ž ž "8G9+' &\$ž "8G9+' &\$ž " % &1 '*(' žFG&' &žFG(,) ž

AJD 400-6

John Deere
Stamford
D+' &'

f@#@Bl
f@#@!@ t
" " "
" "Z " "Z " " "
f@#@Bl

971

f&%) +L

f&% \$L

6G'9B *\$-\$)' \$

6G'9B *%\$\$\$!*!&

6G'9B *%\$\$\$!*!(

'GA 8

5? '+\$!'



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9
- 10

1

'fl \$\$! '%/\$\$' ȷ

ž

ž

1

ž

ž

ž

ž

'&\$\$\$#/%/# "

	"	1470
fl "ȷ	"	4560
fl "ȷ	"	2300
		650