



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	


2000/14/EC & \$\$\$#(#
 z* \$ z' z' D:

	"	kw	"	kw	Amp
480/277		1530,00		1275,00	1917,00
380/220		1370,00		1246,00	2366,00
208/120					

fP GDE' ... GC ;) &
 fDF DE' ... GC " \$(** z&(... GC

Standard Specifications

z ...
 fi ! E ...
 z ...

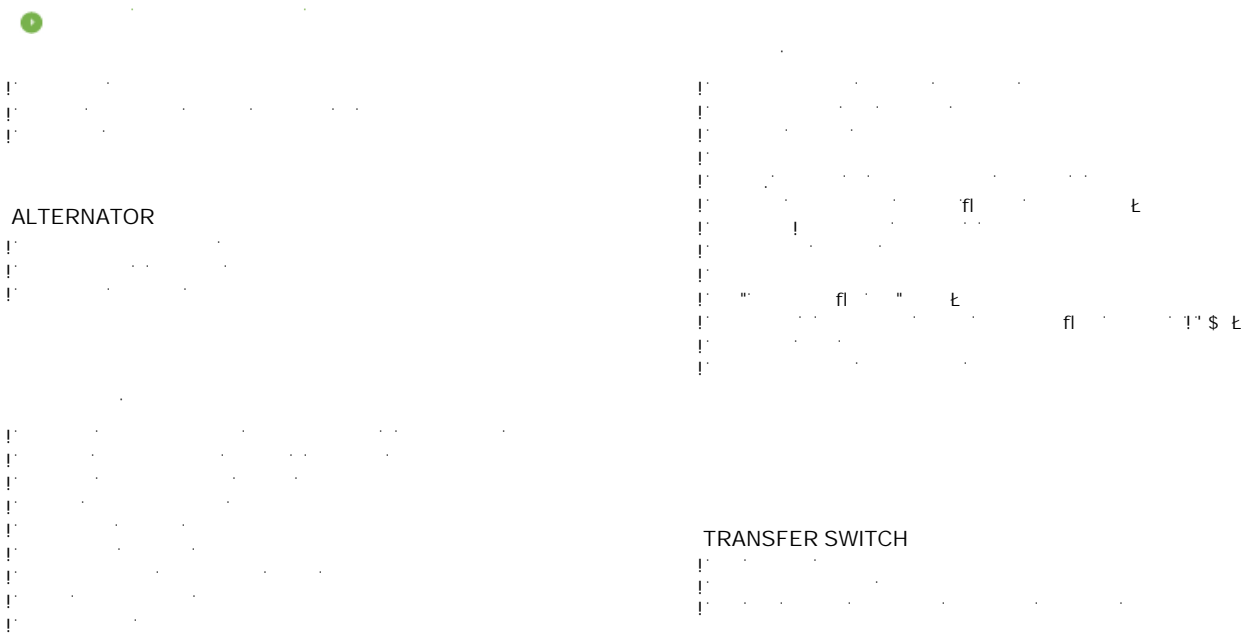

Manufacturer		Cummins		
Model		KTA 50-G9		
		% \$ \$	#	"
		1656,00 kw [2220,00HP]		
	L	50,300		
	"	159 X 159		
		13,9:1		
	fl # t	"#	"	1800
	fl t	L	204,00	
		L	643,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	124,50		
	' # "	301,00		
	° C	515,00		
		24 V d.c.		
	Load	% \$ \$	'+) I) \$ I
	# "			
		330,00	257,00	180,00

		Stamford		
		PI 743C		
	Hz	60		
	kw	1512,00		
7 cg		0,80		
		3		
	fl t	480/277		
	A	2272,00		
Temperature		H		

		fl t		fl t	
	"	"	"	"	L
AC 1530-6	10400,00	5450,00	1950,00	2450,00	2000,00
		fl t		fl t	
	"	"	"	"	L
AK 98	16400,00	9000	2270	2550/3210	1900

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""


%, !&*(

&(\$)

ž

ž

ž

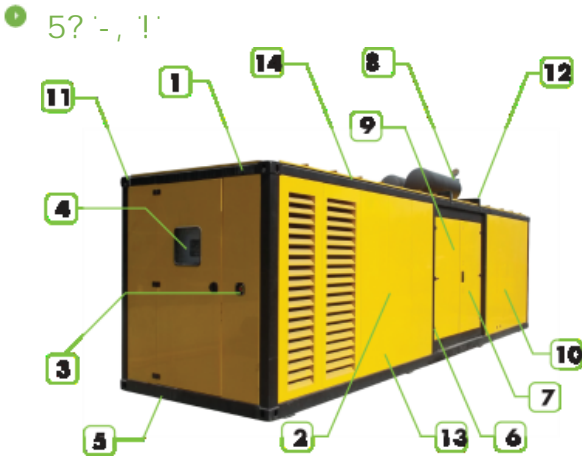

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cables out locations are under of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2270
fl "L	"	9000
fl "L	"	2550/3210
	L	1900