

AC 1275-6

Cummins
Stamford
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z*\$' z'z' D:

	"	kw	"	kw	Amp
480/277		1275,00		1130,00	1699,00
380/220		1225,00		1114,00	2116,00
208/120					0,00

fPQDE

GC ;) &

) & z

fDF DE

%\$1

% %&

GC " \$(**

z&(

GC


Standard Specifications

z

fl

!

z

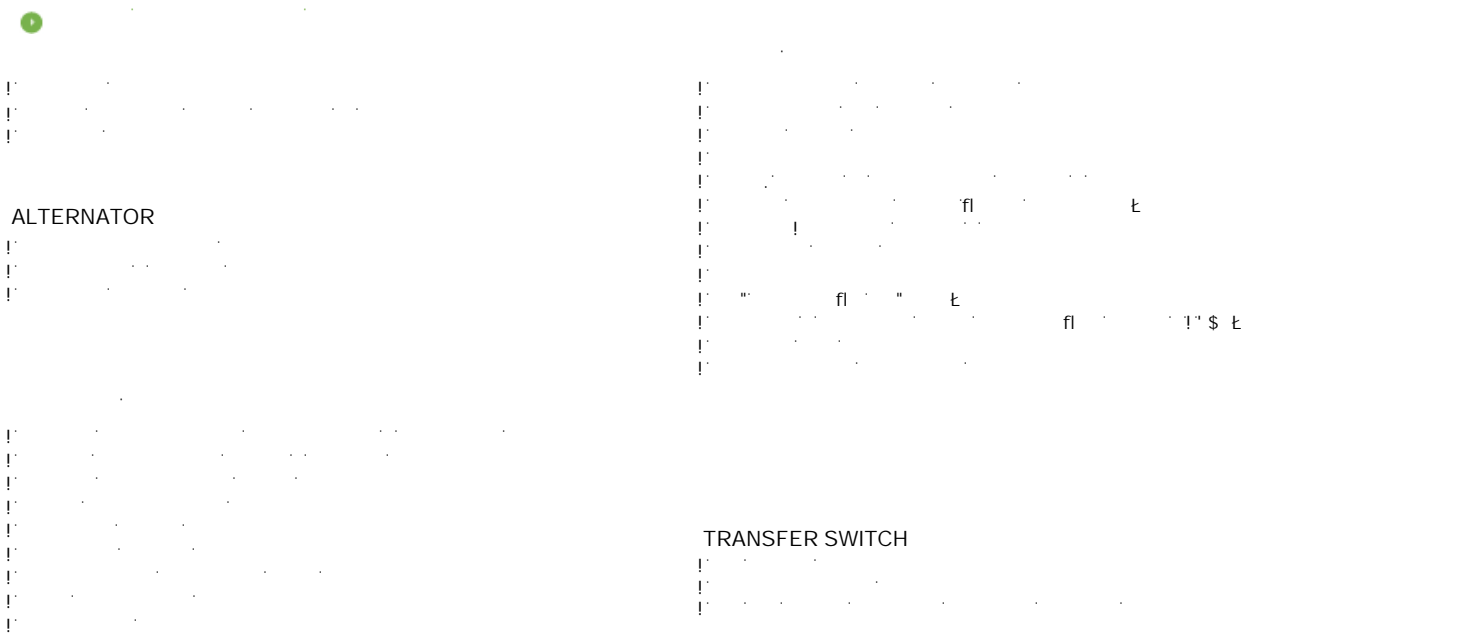


Manufacturer		Cummins		
Model		KTA 50 G3		
		% \$ \$	#	"
		1380,00 kw [1850,00HP]		
	L	50,300		
	"	159 X 159		
		13,9:1		
	fl # ı	"#	"	1800
	fl ı	L	177,00	
		L	415,00	
AbsorbedAirDischargeReSourceKey.Text	' #	"	110,50	
	' #	"	258,00	
	° C	475,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	#	"		
		291,00	222,00	157,00

		Stamford		
		PI 734 B		
	Hz	60		
	kw	1352,00		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	2032,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 1275-6	10000,00	4935,00	2100,00	2500,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 98	14100	9000	2270	2550/3210	1900

1 D+' &'

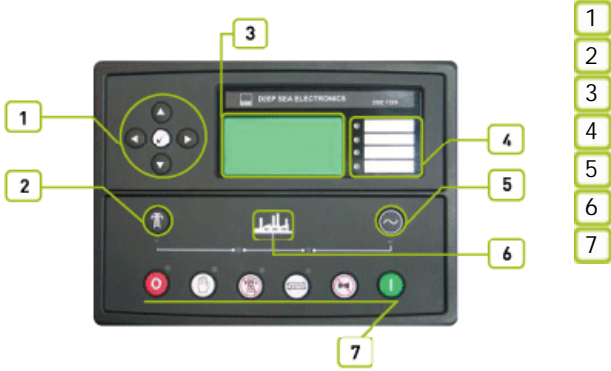

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' žž

8G9+' &\$ž 8G9+' &\$ž

ž

% &1 *('

žFG&' &žFG(,) ž



f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '* \$-) \$

6G'9B '* %\$\$\$! *!&

6G'9B '* %\$\$\$! *!(

#



ž

%, !&* (

)
&(\$)

ž

ž


GA 8

!&+""

ž

AC 1275-6

Cummins
Stamford
D+' &''

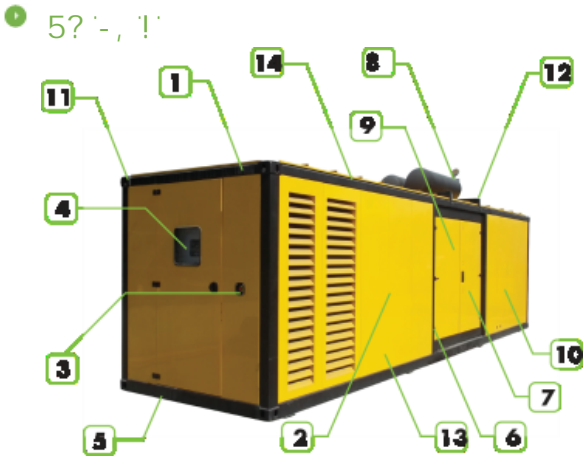

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cables out locations are under of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2270
fl "L	"	9000
fl "L	"	2550/3210
	L	1900