

AC 1285-6

Cummins
Stamford
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	kw	"	kw	Amp
480/277		1285,00		1134,00	1705,00
380/220		1274,00		1126,00	2139,00
208/120					

fPQDE

GC ;) &

) & z

fDF DE

%\$1

%

%&

GC " \$(**

z&(

GC


Standard Specifications

z

fl

!

z

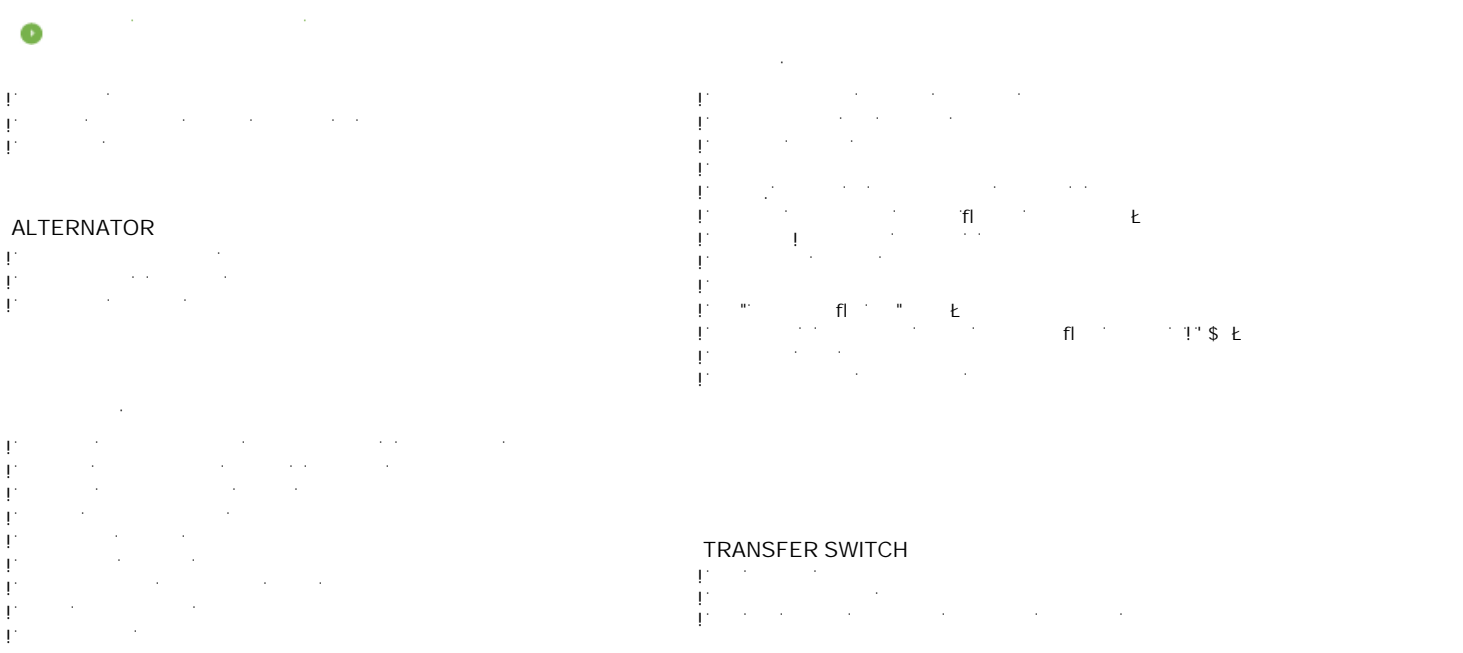


Manufacturer		Cummins		
Model		KTA 50-G3		
		% \$ \$	#	"
		1380,00 kw [1850,00HP]		
	L	50,300		
	"	159 X 159		
		13,9:1		
	fl # ı	"#	"	1800
	L	177,00		
	L	415,00		
AbsorbedAirDischargeReSourceKey.Text	' #	"	110,50	
	' #	"	258,00	
	° C	475,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	#	"		
		291,00	222,00	157,00

		Stamford		
		PI 734 B		
	Hz	60		
	kw	1352,00		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	2032,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 1285-6	10000,00	4935,00	2100,00	2500,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 98	14350	9000	2270	2550/3210	1900

1 D+' &''

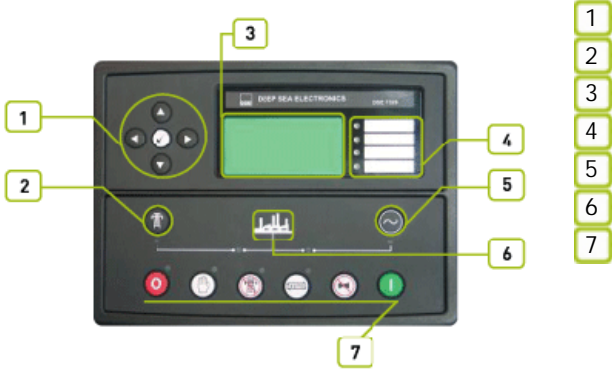

2

"8G9ž ' + &\$ž) 5ž&&\$#(\$'

3

4

5

"8G9+' &\$' &&\$' ž 'fi

"8G9+' &\$' '8G9+' &\$'

ž "

% &1 '*(' "

žFG&' &žFG(,) ž "

ž



f@#@Bt
f@#@@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#



f&%) +t

f&)(, t

f&% \$t

6G'9B '*\$-) \$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž


GA 8

!&+""

ž

AC 1285-6

Cummins
Stamford
D+' &''

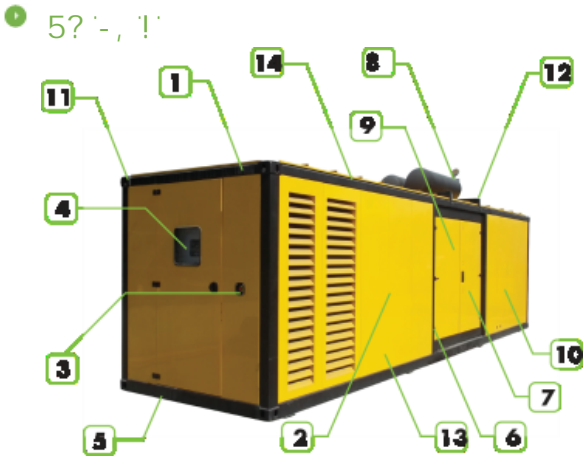

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cables out locations are under of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2270
fl "L	"	9000
fl "L	"	2550/3210
	L	1900