



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

z\* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		404,00		340,00	511,00
380/220		404,00		340,00	645,00
208/120		404,00		340,00	1180,00

fPGDL

=GC ; ) &

, ) & z

rDF DL

%\$i

%

%&

=GC " \$(\*\*

z&(

=GC

Standard Specifications

(\*# \$ \$

z


fl

!

E

z

z

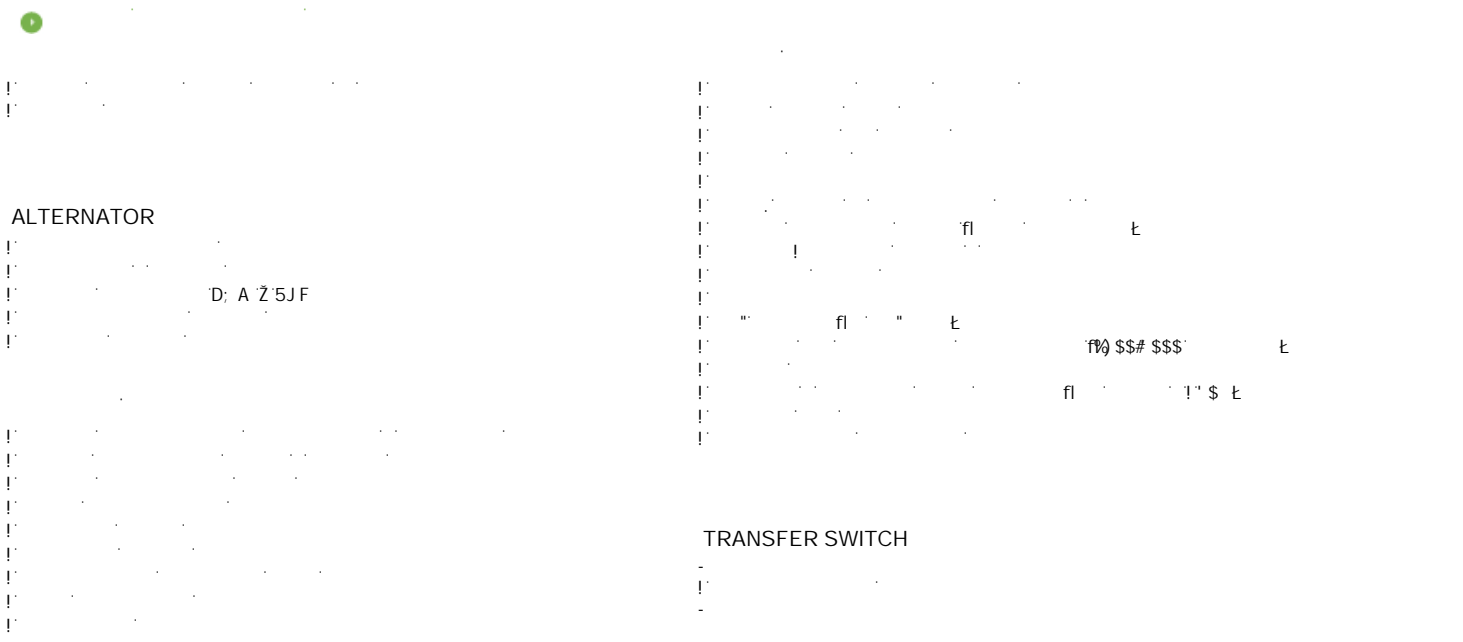


Manufacturer		John Deere		
Model		6125 HF		
Epa		TIER II		
	L	12,50		
	"	127 X 165		
		17.0:1		
	fl # ı	"# "	1800	
	fl ı	L	42,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	34,00		
	' # "	91,00		
	° C	560		
		12 V d.c.		
	Load	%\$ı	'+)ı	)\$ı
	# "			
		94,50	69,20	47,70

		Stamford		
		HCI 544C		
	Hz	60		
	"	475		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	714		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD 404-6	3470	3230	1170	2050	330
		fl ı		fl ı	
	"	"	"	"	L
AK 70	4670	4560	1470	2300	650

1 D+' &'

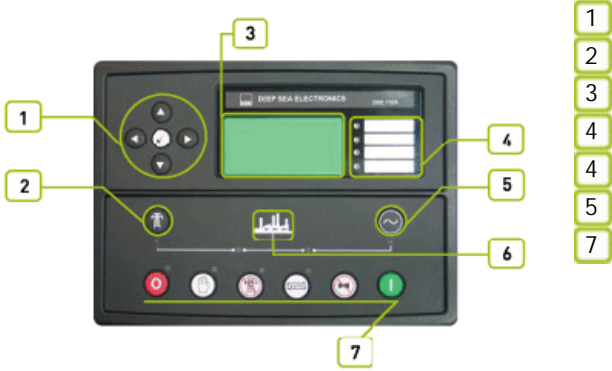

2

"8G9ž +' &\$ž ) 5ž&&\$#(\$

3

4

5

"8G9+' &\$ž &)' ž ž "8G9+' &\$ž "8G9+' &\$ž " % &1 '\*(' žFG&' &žFG(,) ž



