



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		128,00		116,00	174,00
380/220		123,00		112,00	212,00
208/120		127,00		115,00	399,00

FDGDE

GC ;) &

) & z

FDGDE

%\$i

%

%&

GC" \$(**

z&(

GC

Standard Specifications


z

fl

E

z

z

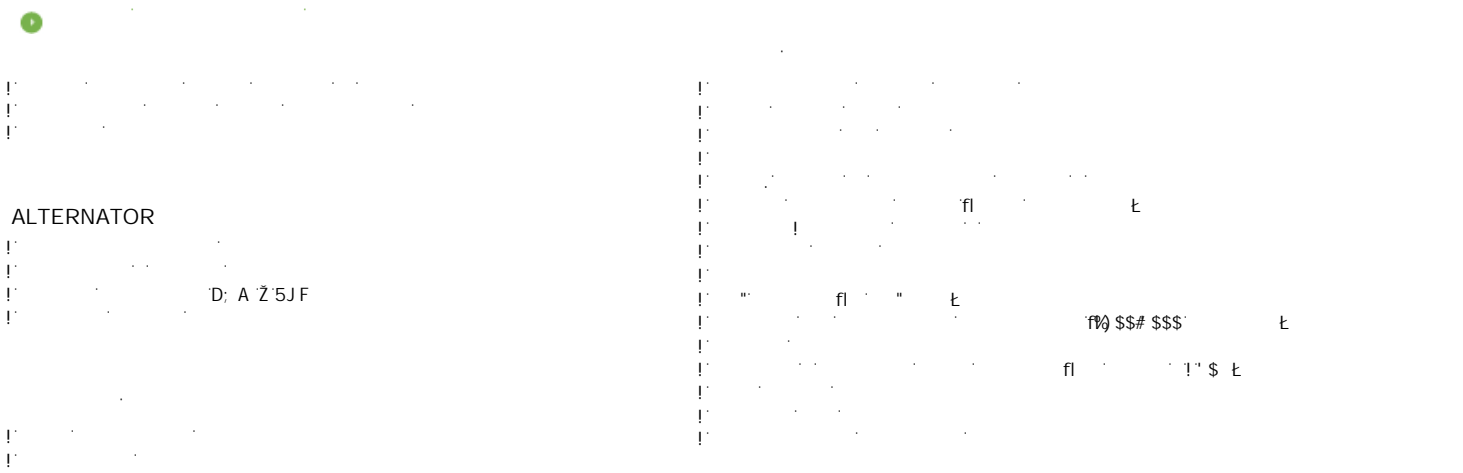

ALTERNATOR


TRANSFER SWITCH

Manufacturer		John Deere		
Model		6068 HF 285		
Epa		TIER III		
	L	6,80		
	"	106 X 127		
		17.0:1		
	fl # ı	"# "	1800	
	fl ı	L	32,50	
		L	26,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	11,00		
	' # "	28,00		
	° C	528		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "			
		34,00	27,00	20,30

		Stamford		
		UCI 274E		
	Hz	60		
	"	142		
7cg		0,80		
		3		
	fl ı	480/277		
	A	213		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD 128-U	1560	2450	1120	1600	360
		fl ı		fl ı	
	"	"	"	"	L
ASM 6	2075	3270	1170	1870	320

1 D+&''

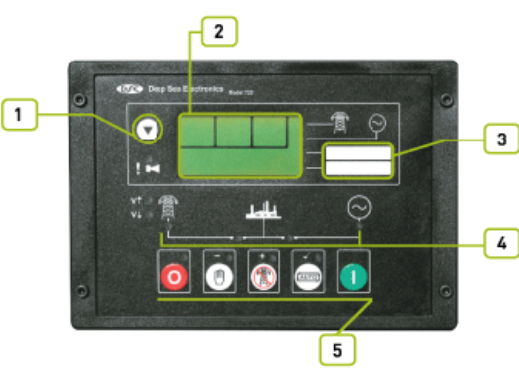

- 1
- 2
- 3
- 4
- 5

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$

8G9'+&\$

fl

8G9'+&\$

ž

fl

ž

ž

fl

%\$\$

ž

#

ž

ž

ž

ž

"

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(&

GA 8

!%& "

%, !&* \$

)
%&\$)

ž

ž

ž

AJD 128-U

John Deere
Stamford
D+&

5GA * !



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

	"	1170
fl "Ł	"	3270
fl "Ł	"	1870
		320