


<b>ISO8528</b>	GC ; ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

**2000/14/EC**  
 &\$\$\$#( #  
 z\*\$ z'z' D:

	"	"	"	"	Amp
480/277		140,00		124,00	186,00
380/220		123,00		112,00	212,00
208/120		140,00		124,00	430,00

Standard Specifications

Standard Specifications

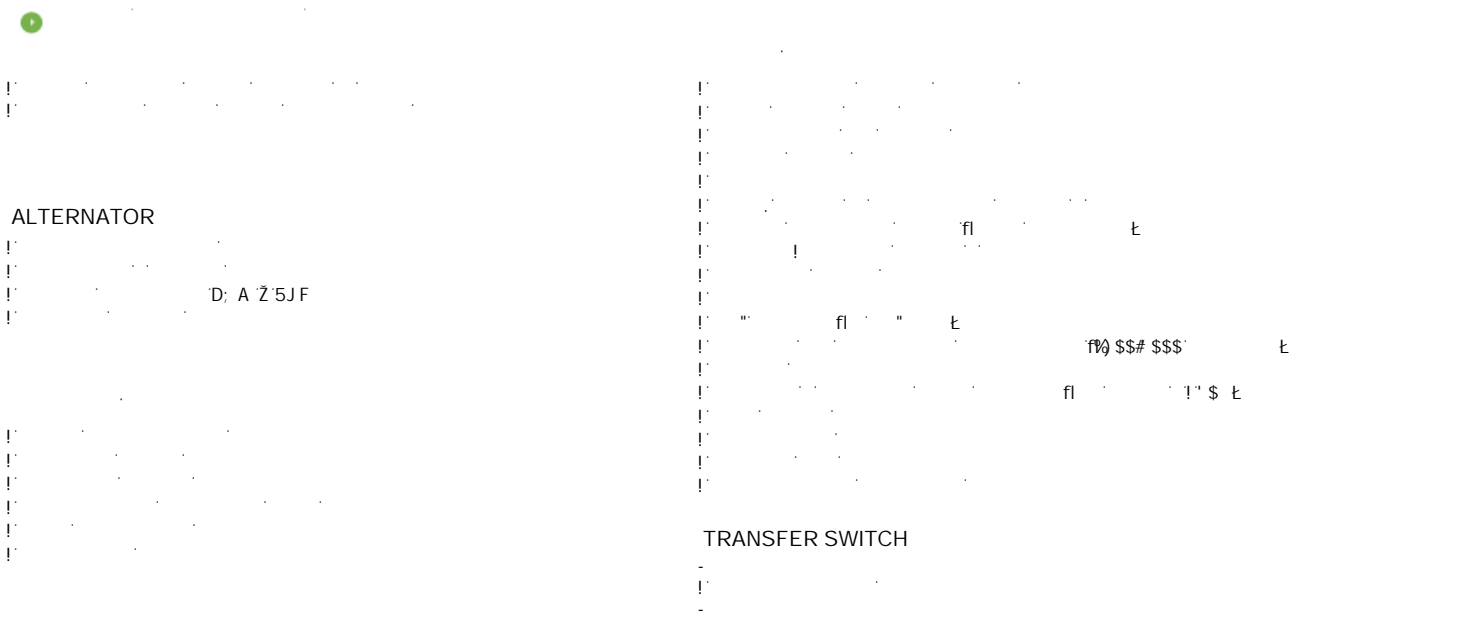


Manufacturer		Cummins		
Model		QSB7-G2		
Epa		TIER III		
	L	6,70		
	"	107x124		
		17,2:1		
	fl # ı	"# "	1800	
	fl ı	L	19,00	
		L	29,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	14,50		
	' # "	36,00		
	° C	550		
		12 V d.c.		
	Load	%\$ı	'+)ı	)\$ı
	# "			
		40,00	31,00	22,00

		Stamford		
		UCI274E		
	Hz	60		
	"	142		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	213		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
ACQ140U	1650	2320	1120	1640	360
		fl ı		fl ı	
	"	"	"	"	L
ASM 6	2170	3270	1170	1870	320

1 D'+'&'!

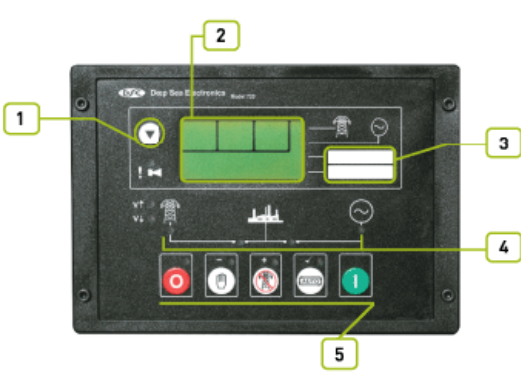

- 1
- 2
- 3
- 4
- 5

2

8G9ž +&\$ž ) 5ž&&\$#(\$

3

4

5

8G9'+&\$

8G9'+&\$

8G9'+&\$

fl

ł

ž

fl

%%\$

ł

#

ž

ž

ž

ž

"

f@BŁ  
f@%&@Ł  
f@%&@BŁ

#

#

6G'9B \*\$-\$) \$  
6G'9B \*%\$\$!\*&  
6G'9B \*%\$\$!\*(

GA 8

!%& "

%, !&\* \$

)  
%&\$)

ž

ž

ž

5GA \* !



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

	"	1170
fı "Ł	"	3270
fı "Ł	"	1870
		320