

ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	"	"	"	Amp
480/277		150,00		138,00	207,00
380/220		123,00		112,00	212,00
208/120		140,00		124,00	430,00


Standard Specifications

z

fl ! E

z

z

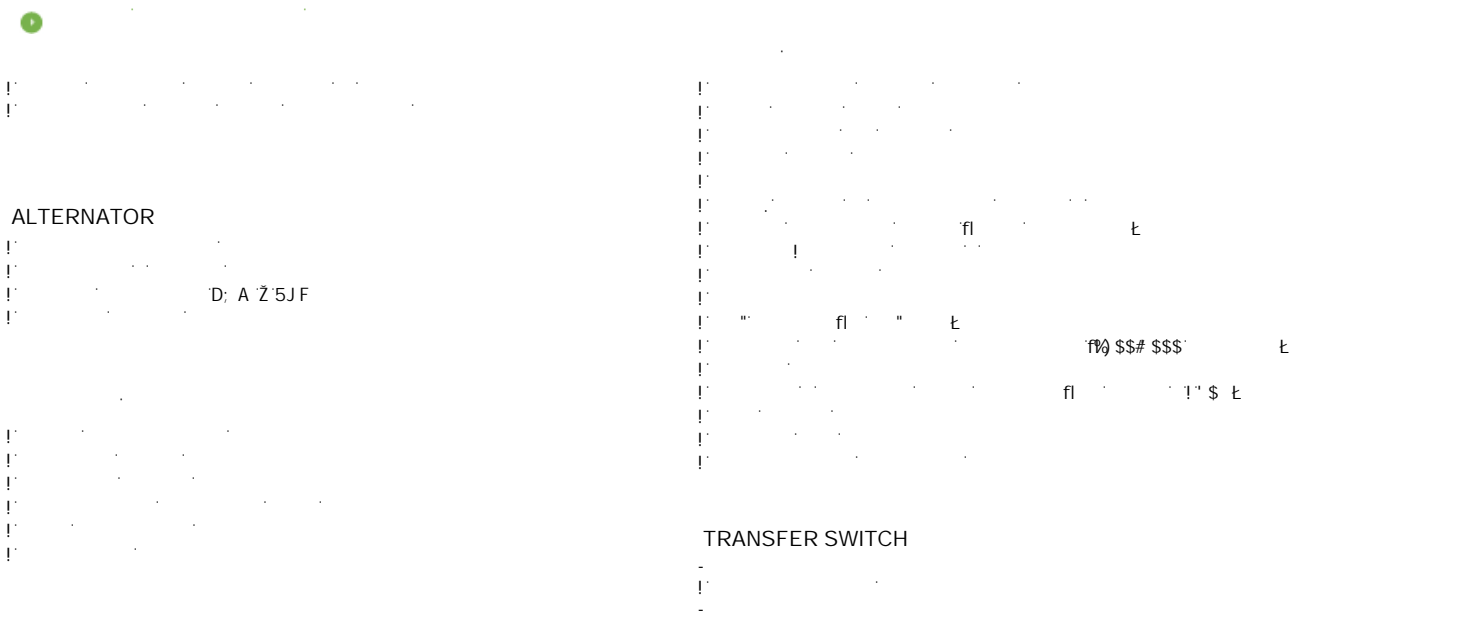


Manufacturer		Cummins		
Model		QSB7-G3		
Epa		TIER III		
	L	6,70		
	"	107x124		
		17,2:1		
	fl # ı	"# "	1800	
	fl ı	L	19,00	
		L	29,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	14,80		
	' # "	37,60		
	° C	526		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "			
		42,00	33,00	23,00

		Stamford		
		UCI274F		
	Hz	60		
	"	164		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	246		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
ACQ150U	1700	2320	1120	1640	360
		fl ı		fl ı	
	"	"	"	"	L
ASM 6	2220	3270	1170	1870	320

1 D' +& '!'

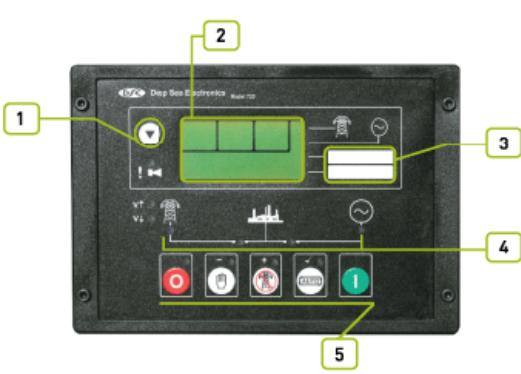

- 1
- 2
- 3
- 4
- 5

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$

8G9'+&\$

8G9'+&\$

fl

ł

ž

fl

%\$\$

ł

#

ž

ž

ž

ž

"

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

!%& "

%, !&* \$

%)

ž

ž

ž

5GA * !



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

	"	1170
fl "Ł	"	3270
fl "Ł	"	1870
		320