

ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	"	"	"	Amp
480/277		150,00		180,00	270,00
380/220		200,00		180,00	342,00
208/120		200,00		180,00	624,00


Standard Specifications

z

fl ! E

z

z

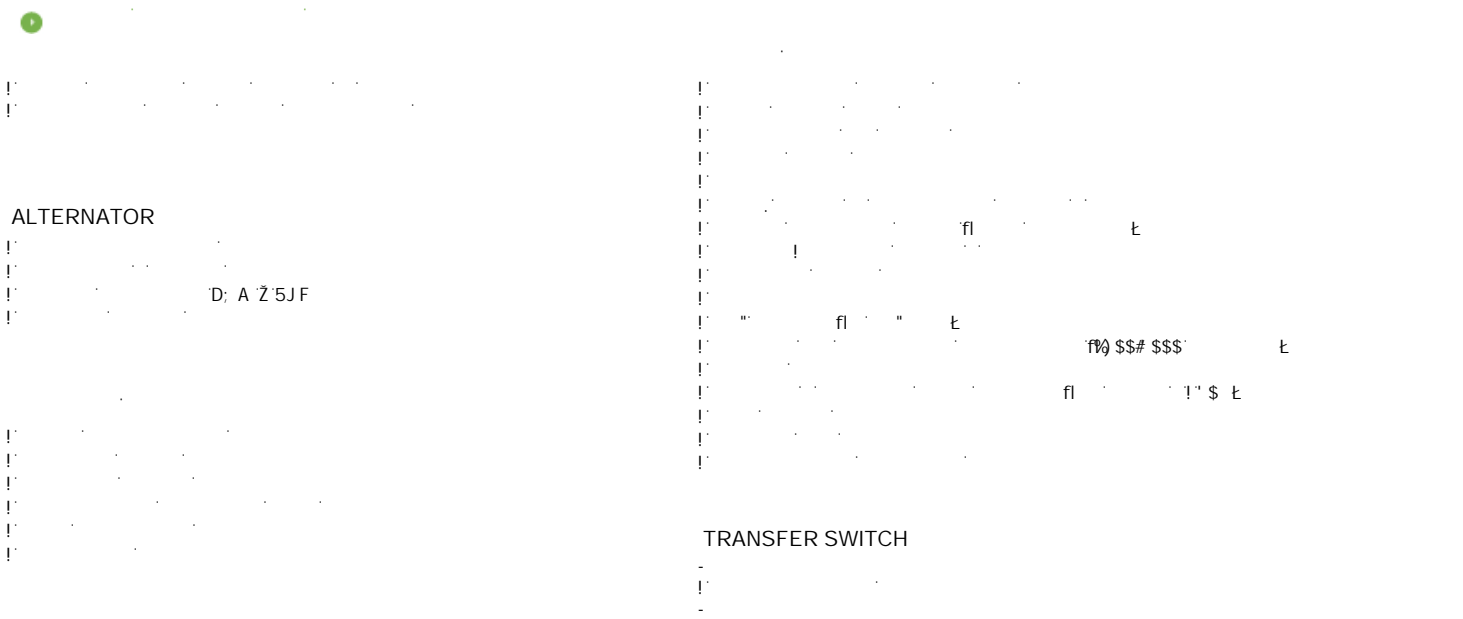

2

Manufacturer		Cummins		
Model		QSB7-G5		
Epa		TIER III		
	L	6,70		
	"	107x124		
		17,2:1		
	fl # ı	"# "	1800	
	fl ı	L	19,00	
		L	29,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	16,00		
	' # "	44,00		
	° C	532		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "			
		50,00	40,00	30,00


3

		Stamford		
		UCI274J		
	Hz	60		
	"	240		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	360		
Temperatur		H		

3

		fl ı		fl ı	
		"	"	"	L
ACQ200U	1980	2400	1150	1750	420
		fl ı		fl ı	
		"	"	"	L
ASM 7	2740	4000	1210	2000	420

1 D' + & !'

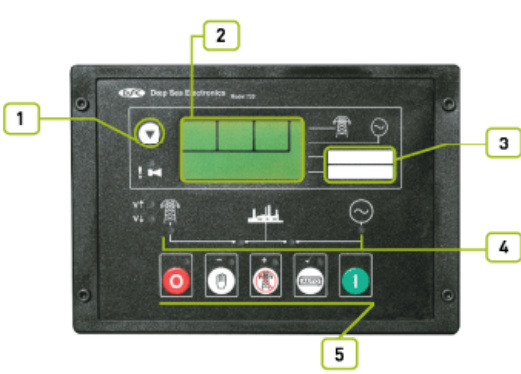

- 1
- 2
- 3
- 4
- 5

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9' + & \$

8G9' + & \$

fl

8G9' + & \$

ž

fl

ž

ž

fl

%\$\$

ž

#

ž

ž

ž

ž

f@BŁ
f@%&@Ł
f@%&@BŁ

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

#

GA 8

!%& "

%, !&* \$

) %&\$

ž

ž

ž

5GA +!



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

	"	1210
f) "7	"	4000
f) "7	"	2000
		420