


<b>ISO8528</b>	...	...	...	...	GC ; ) &
<b>SZUTEST</b>	...	...	...	...	GC - \$\$\$
<b>CE</b>	...	...	...	...	

**2000/14/EC** &\$\$\$( #  
 z\* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		285,00		260,00	391,00
380/220		285,00		260,00	494,00
208/120		285,00		260,00	902,00

Standard Specifications


Standard Specifications

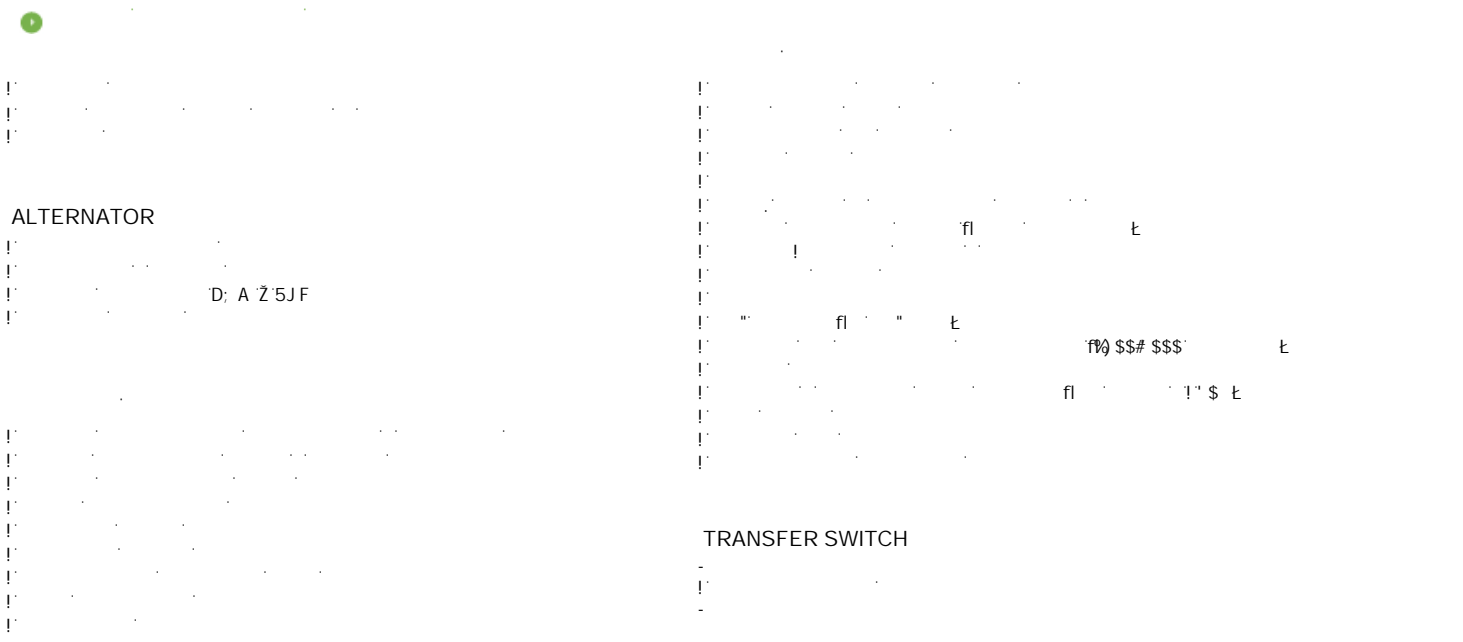

Manufacturer		Cummins		
Model		NT855-G6		
	L	14,00		
	"	140x152		
		14,0:1		
	fl # Ł	"# "	1800	
	fl "Ł	L	38,60	
		L	68,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	24,40		
	' # "	68,00		
	° C	524		
		24 V d.c.		
	Load	%\$ \$i	'+) i	) \$i
	# "			
		74,00	56,00	40,00

		Stamford		
		HCI444E		
	Hz	60		
	"	352		
7 cg'		0,80		
		3		
	fl Ł	480/277		
	A	529		
Temperatur		H		

		fl "Ł		fl "Ł	
	"	"	"	"	L
AC285-6	3170	3230	1170	2000	330
		fl "Ł		fl "Ł	
	"	"	"	"	L
AK 70	4440	4550	1460	2300	650

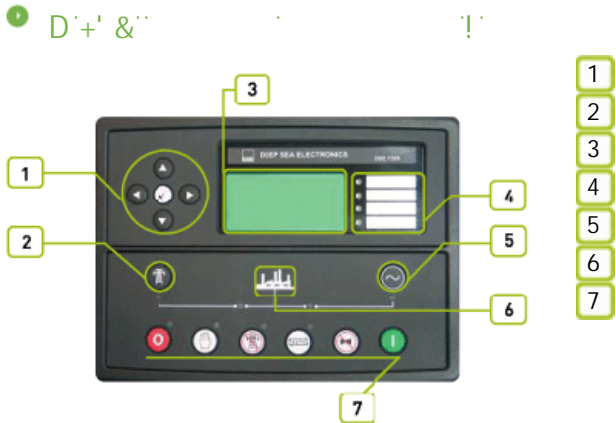



f@z@Bl  
f@!@!@t

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B\*\*\$-)\$

6G'9B\*\*%\$\$\$!\*!&

6G'9B\*\*%\$\$\$!\*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

%, !&\* \$

&(\$)

ž

ž

!&(

"

ž

ž

"

"

