


AC 355-6

Cummins
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	kw	"	kw	Amp
480/277		355,00		322,00	484,00
380/220		355,00		322,00	612,00
208/120		355,00		322,00	1118,00

fPQDE

GC,) &

,) & z

fDF DE

%\$!

%

%&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR

D; A Z'5JF


TRANSFER SWITCH

Manufacturer		Cummins		
Model		NTA855-G3		
		%	\$\$	"# "
		399,00 kw [535,00HP]		
	L	14,000		
	"	140x152		
		14,0:1		
	fl # ı	"# "	1800	
	L	38,60		
	L	66,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	32,60		
	' # "	90,50		
	° C	527,00		
		24 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "	87,00	66,00	47,00

		Mecc Alte		
		ECO40 1S/4		
	Hz	60		
	kw	384,00		
7cg		0,80		
		3		
	fl ı	480/277		
	A	578,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 355-6	3130,00	2963,00	1550,00	2071,00	700,00
		fl ı		fl ı	
	"	"	"	"	L
MS 70	4200	4460	1606	2477	700

1 D+' &'

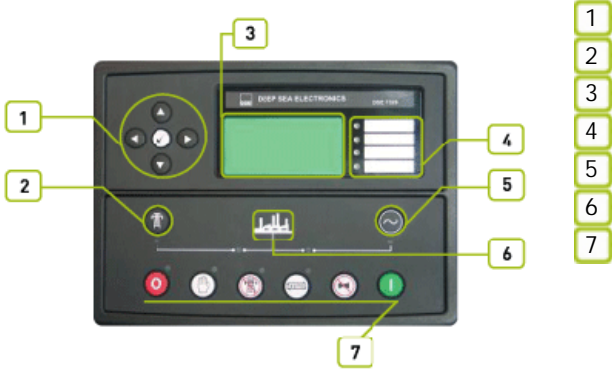

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

'8G9+' &\$
&&\$' ž

"'8G9+' &\$

'8G9+' &\$

% &1 '*('

žFG&' &žFG(,) ž



f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&% \$L

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž

GA 8

!&+""

ž

AC 355-6

Cummins
Mecc Alte
D+ &''



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700