



ISO8528	GC ;) &
SZUTEST	GC - \$\$%
CE	

2000/14/EC

&\$\$#(#

z*\$ z'z' D:

	"	"	"	"	Amp
480/277		164,00		148,00	222,00
380/220		145,00		132,00	250,00
208/120		160,00		145,00	503,00

Standard Specifications

z

fl ! E

z

z




TRANSFER SWITCH

Manufacturer	John Deere		
Model	6068HF275		
Epa	TIER II		
	L	6,80	
	"	106x127	
		17,0:1	
	"# "	1800	
	L	31,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	13,70	
	' # "	35,80	
	° C	543	
		12 V d.c.	
	Load	%)\$İ	'+) İ
	# ")\$İ	
		41,70	31,70 21,70

	Stamford	
	UCI274F	
	Hz	60
	"	164
7 cg'		0,80
		3
	fl Ł	480/277
	A	246
Temperatur		H

		fl Ł		fl Ł	
	"	"	"	"	L
AJD 164-6	1580	2440	1120	1650	360
		fl Ł		fl Ł	
	"	"	"	"	L
ASM 6	2100	3270	1170	1870	320

D'+&!'

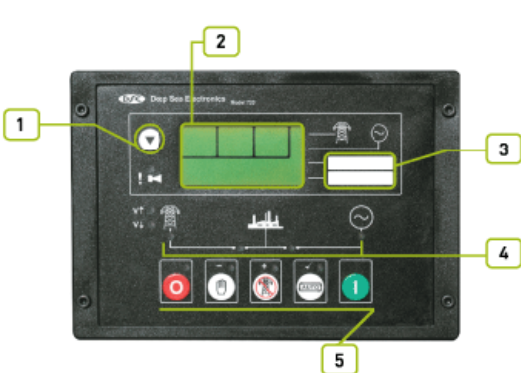

- 1
- 2
- 3
- 4
- 5

- 1 8G9ž +&\$ž) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+&\$ 8G9'+&\$ ž fl
&)' ž
'8G9'+&\$ ž "
- 5 fl ž fl %&\$
ž
- 6 # ž ž ž ž " ž

f@Bt
f@%&@t
f@%&@Bt

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

!%& "

%, !&* \$

%)

ž

ž

ž

5GA '* !'



6

7

	"	1170
f "Ł	"	3270
f "Ł	"	1870
		320