



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z*\$ z'%\$D:

	"	"	"	"	Amp
480/277		165,00		148,00	222,00
380/220		160,00		145,00	275,00
208/120		164,00		147,00	510,00

fPGDL

GC ;) &

) & z

rDF DL

%\$i

%

%&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z




TRANSFER SWITCH

Manufacturer		John Deere		
Model		6068HF275		
Epa		TIER II		
	L	6,80		
	"	106x127		
		17,0:1		
	fl # Ł	"# "	1800	
	fl "Ł	L	31,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	13,70		
	' # "	35,80		
	° C	543		
		12 V d.c.		
	Load	%"\$İ	'+) İ)\$İ
	# "			
		41,70	31,70	21,70

		Stamford		
		UCI274G		
	Hz	60		
	"	184		
7 cg'		0,80		
		3		
	fl Ł	480/277		
	A	276		
Temperatur		H		

		fl "Ł		fl "Ł	
	"	"	"	"	L
AJD 165-6	1630	2450	1120	1650	360
		fl "Ł		fl "Ł	
	"	"	"	"	L
ASM 6	2150	3270	1170	1870	320

D+&

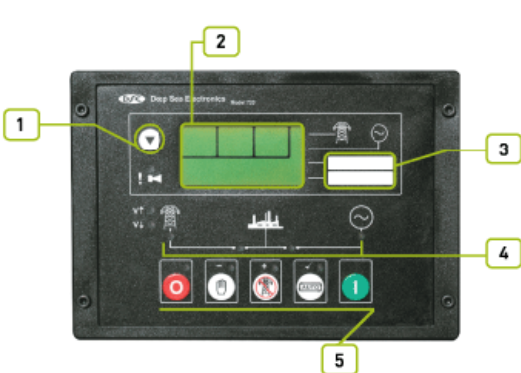

- 1
- 2
- 3
- 4
- 5

- 1 8G9ž +&\$ž) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+&\$ 8G9'+&\$ ž fl
&)' ž
'8G9'+&\$ ž "
- 5 fl ž ž ž ž ž " fl %&\$
ž
ž ž ž ž ž

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(&

GA 8

!%& "

%, !&* \$

%)

ž

ž

ž

5GA *



1. 2. 3. 4. 5. 6. 7. 8. 9.

1170

3270

1870

320

	"	1170
fl "L	"	3270
fl "L	"	1870
		320