



| | | | | | | |
|----------------|-----|-----|-----|-----|-----|-------------|
| ISO8528 | ... | ... | ... | ... | ... | GC ;) & |
| SZUTEST | ... | ... | ... | ... | ... | GC - \$\$\$ |
| CE | ... | ... | ... | ... | ... | |

2000/14/EC &\$\$\$#(#
 z*\$ z'%\$D:

| | " | " | " | " | Amp |
|---------|---|--------|---|--------|--------|
| 480/277 | | 184,00 | | 168,00 | 252,00 |
| 380/220 | | 177,00 | | 161,00 | 305,00 |
| 208/120 | | 180,00 | | 164,00 | 569,00 |

Standard Specifications


(*\$ \$S



| | | | | |
|--------------------------------------|--------|------------|-------|-------|
| Manufacturer | | John Deere | | |
| Model | | 6068HF | | |
| | L | 6,80 | | |
| | " | 106x127 | | |
| | | 17,0:1 | | |
| | fl # ı | "# " | 1800 | |
| | fl "ı | L | 34,00 | |
| | | L | 40,00 | |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 14,80 | | |
| | ' # " | 40,00 | | |
| | ° C | 567 | | |
| | | 12 V d.c. | | |
| | Load | %)\$ı | '+)ı |)\$ı |
| | # " | | | |
| | | 47,00 | 36,00 | 23,50 |

| | | | | |
|------------|------|----------|--|--|
| | | Stamford | | |
| | | UCI274H | | |
| | Hz | 60 | | |
| | " | 204 | | |
| 7 cg' | | 0,80 | | |
| | | 3 | | |
| | fl ı | 480/277 | | |
| | A | 294 | | |
| Temperatur | | H | | |

| | | | | | |
|----------|------|-------|------|-------|-----|
| | | fl "ı | | fl "ı | |
| | " | " | " | " | L |
| AJD184-6 | 1630 | 2440 | 1150 | 1650 | 360 |
| | | fl "ı | | fl "ı | |
| | " | " | " | " | L |
| ASM 6 | 2150 | 3250 | 1160 | 1900 | 360 |

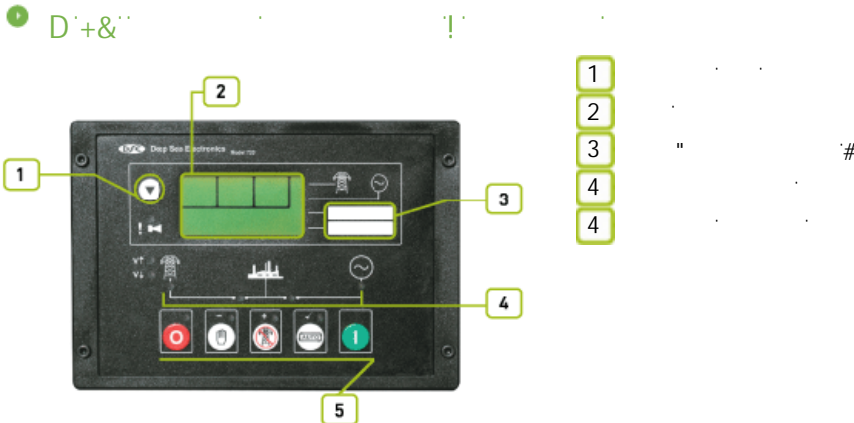

f@Bt
f%&@t
f@z@Bt

#

#

6G'9B*\$-\$)
6G'9B*\$\$\$!*&
6G'9B*\$\$\$!*(

GA 8

!%&
z

5GA *



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9

| | | |
|-------|---|------|
| | " | 1160 |
| fl "L | " | 3250 |
| fl "L | " | 1900 |
| | | 360 |