



<b>ISO8528</b>	...	...	...	...	GC ; ) &
<b>SZUTEST</b>	...	...	...	...	GC - \$\$\$
<b>CE</b>	...	...	...	...	

**2000/14/EC** &\$\$\$( #  
 z\*\$ z'%\$D:

	"	"	"	"	Amp
480/277		185,00		168,00	252,00
380/220		184,00		166,00	315,00
208/120		185,00		167,00	580,00

Standard Specifications

(\*\$ \$S



ALTERNATOR


TRANSFER SWITCH

Manufacturer		John Deere		
Model		6068HF275		
Epa		TIER II		
	L	6,80		
	"	106x127		
		17,0:1		
	fl # ı	"# "	1800	
	fl ı	L	34,00	
		L	40,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	15,00		
	' # "	40,00		
	° C	550		
		12 V d.c.		
	Load	%\$ı	'+)ı	)\$ı
	# "			
		46,70	35,50	24,00

		Stamford		
		UC1274H		
	Hz	60		
	"	204		
7cg		0,80		
		3		
	fl ı	480/277		
	A	306		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD185-6	1680	2440	1120	1650	360
		fl ı		fl ı	
	"	"	"	"	L
ASM 6	2200	3250	1160	1900	360

1 D'+&''

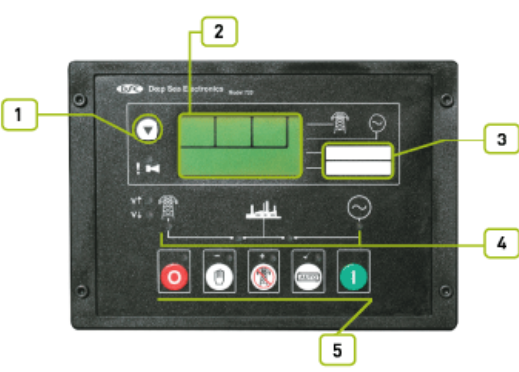

- 1
- 2
- 3
- 4
- 4

2

8G9ž +&\$ž ) 5ž&&\$#(\$

3

4

5

8G9'+&\$

8G9'+&\$

8G9'+&\$

fl

ł

ž

fl

%\$\$

ł

#

ž

ž

ž

ž

"

f@Bt  
f@%&@t  
f@%&@Bt

#

#

6G'9B\*\$-\$)  
6G'9B\*\$\$\$!\*&  
6G'9B\*\$\$\$!\*(

GA 8

!%&  
ž

5GA \* !



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9

	"	1160
fl "Ł	"	3250
fl "Ł	"	1900
		360