



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

z\* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		372,00		338,00	508,00
380/220		320,00		292,00	554,00
208/120		352,00		320,00	1111,00

fPGDL

GC ; ) &

) & z

rDF DL

%\$i

%

%&

GC " \$(\*\*

z&(

GC

Standard Specifications


z

fl

E

z

z

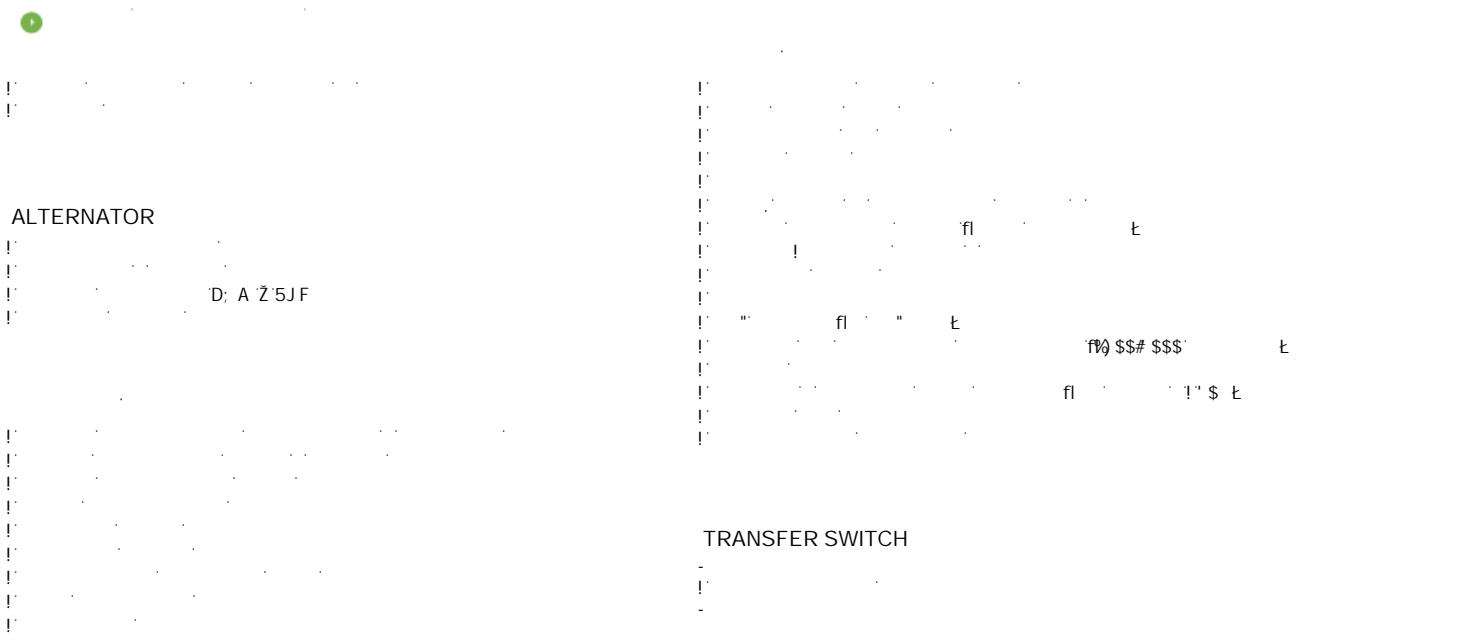

Manufacturer		John Deere		
Model		6125HF		
Epa		TIER II		
	L	12,50		
	"	127x165		
		17,0:1		
	fl # ı	"# "	1800	
	fl ı	L	42,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	92,90		
	' # "	86,50		
	° C	546		
		12 V d.c.		
	Load	%\$ı	'+)ı	)\$ı
	# "			
		95,50	69,30	47,70

		Stamford		
		HCI444E		
	Hz	60		
	"	352		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	508		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD 372-6	3250	3150	1170	2050	330
		fl ı		fl ı	
	"	"	"	"	L
AK 70	4530	4550	1460	2300	650





