



ISO8528

GC ; ) &-

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

z\*\$' z'z' D:

	"	kw	"	kw	Amp
480/277		488,00		450,00	677,00
380/220		462,00		420,00	798,00
208/120		488,00		446,00	1547,00

fPQDE

GC ; ) &

) & z

fDF DE

%\$1

%

%&

GC " \$(\*\*

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR

D; A Z'5JF


TRANSFER SWITCH

Manufacturer		Doosan		
Model		P180LE		
			% \$ \$	"# "
			540,00 kw [724,00HP]	
	L	18,300		
	"	128x142		
		15:1		
	fl # ı	"# "	1800	
	L	35,00		
	L	91,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	41,60		
	' # "	114,10		
	° C	606,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı	) \$ı
	# "			
		128,20	93,40	63,30

		Stamford		
		HCI544D		
	Hz	60		
	kw	515,00		
7cg		0,80		
		3		
	fl ı	480/277		
	A	774,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AD 488-6	3600,00	3264,00	1550,00	1991,00	850,00
		fl ı		fl ı	
	"	"	"	"	L
MS 80	4790	4810	1606	2615	850

1 D+ &

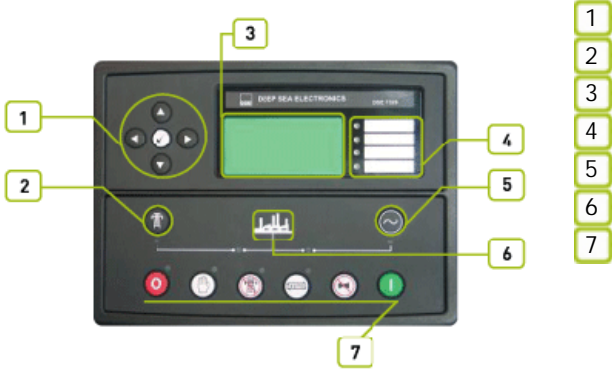

2

8G9ž + &\$ž ) 5ž&&\$#(\$

3

4

5

8G9+' &\$  
&&\$' ž

8G9+' &\$

8G9+' &\$

% &1 \* (

žFG&' &žFG(,) ž



f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '\*\$-) \$

6G'9B '\*\$\$\$!\*!&

6G'9B '\*\$\$\$!\*!(

#



ž

%, !&\*(

)  
&(\$)

ž

ž

GA 8

!&+""

ž



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850