



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		592,00		538,00	809,00
380/220		590,00		537,00	1020,00
208/120		592,00		538,00	1867,00


Standard Specifications

(*) \$ \$ S

Manufacturer		Doosan		
Model		P2221E		
	L	21,93		
	"	128x142		
		15:1		
	fl # Ł	"# "	1800	
	fl "Ł	L	40,00	
		L	113,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	46,70		
	' # "	137,00		
	° C	606		
		24 V d.c.		
	Load	%"\$!ı	'+)ı)\$ı
	# "			
		147,00	112,00	75,90

		Stamford
		HCI544F
	Hz	60
	"	660
7 cg'		0,80
		3
	fl Ł	480/277
	A	992
Temperatur		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
AD 592-6	4400	3700	1400	2120	730
		fl "Ł		fl "Ł	
	"	"	"	"	L
AK 85	6060	5800	1620	2550	1150

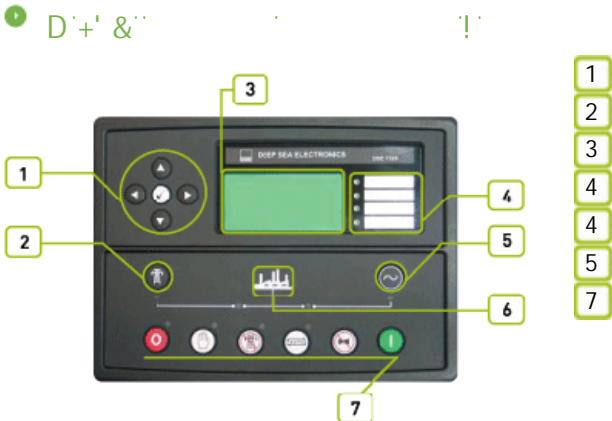

f@z@Bl
f@!@!@t

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&)(, t

f&%) +t

f&% \$t

GA 8

"

%, !&* \$

)
&(\$)

ž

ž

!&(

"

ž

ž

"

"

