



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z*\$' z'z' D:

	"	kw	"	kw	Amp
480/277		308,00		277,00	417,00
380/220		276,00		251,00	477,00
208/120		306,00		275,00	954,00

fPQDE

GC ;) &

) & z

fDF DE

%\$!

%

%&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR


D; A z'5JF

TRANSFER SWITCH

Manufacturer		Doosan		
Model		P126TI-II		
		% \$ \$	"# "	
		342,00 kw [459,00HP]		
	L	11,050		
	"	123x155		
		17.1:1		
	fl # ı	"# "	1800	
	fl ı	L	23,00	
		L	52,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	3,22		
	' # "	64,20		
	° C	580,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "			
		73,80	56,00	37,00

		Stamford		
		HCI444D		
	Hz	60		
	kw	300,00		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	496,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AD 308-6	2550,00	3017,00	1300,00	1588,00	470,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	3240	3960	1356	2097	470

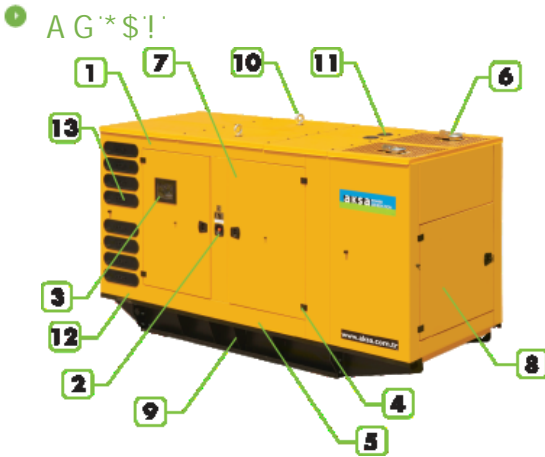

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470