



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
 z* \$ z' z' D:

	"	kw	"	kw	Amp
480/277		309,00		277,00	416,00
380/220		307,00		275,00	522,00
208/120		308,00		276,00	958,00

fP GDE GC,) &
 fDF D% \$! % % & GC " \$(* z & GC

Standard Specifications
 z
 fl ! E
 z
 z


ALTERNATOR
 D; A Z 5J F
 fl E
 fl " E
 fl \$\$\$ \$\$\$ E
 fl " \$ E

TRANSFER SWITCH
 fl

Manufacturer	Doosan		
Model	P126TI-II		
		% \$ \$	"# "
		331,00 kw[HP]	
	L	11,100	
	"	123x155	
		17:1	
	fl # ı	"# "	1800
	fl ı	L	23,00
		L	65,00
AbsorbedAirDischargeReSourceKey.Text	' # "	28,20	
	' # "	64,20	
	° C	580,00	
		24 V d.c.	
	Load	% \$ \$ı	'+) I
	# ") \$ı	
		73,80	56,00 37,00

		Stamford
		HCI444E
	Hz	60
	kw	352,00
7cg		0,80
		3
	fl ı	480/277
	A	529,00
Temperature		H

		fl ı		fl ı	
	"	"	"	"	L
AD 309-6	2710,00	3200,00	1200,00	1650,00	330,00
		fl ı		fl ı	
	"	"	"	"	L
AK 70	3470.00	4550	1460	2300	650

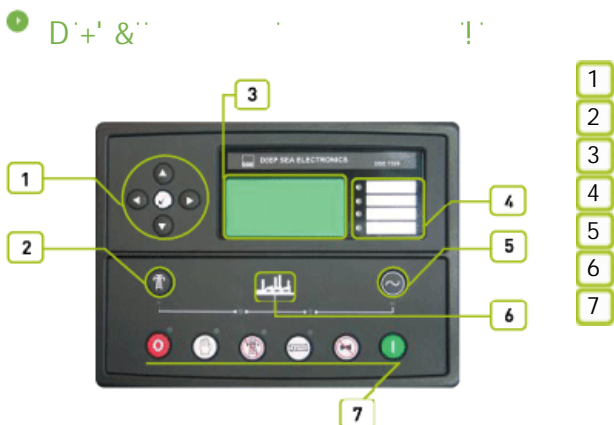

1

1

f@z@Bl
f@!@!@t

""
"z" "z" ""

f@z@Bl

971

#

#

#

#

1

1

f&%) +t

f&)(, t

f&% \$t

6G'9B '* \$-) \$

6G'9B '* %\$\$\$! *!&

6G'9B '* %\$\$\$! *!(

#

1

z

%, !&*(

)
&(\$)

z

z

GA 8

!&+""

z



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10