

AC 820-6

Cummins
Stamford
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	"	"	"	Amp
480/277		820,00		739,00	1111,00
380/220		812,00		733,00	1392,00
208/120		815,00		736,00	2553,00

fPQDE

GC,) &

,) & z

fDF DE

%\$!

%

%&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

z


ALTERNATOR

TRANSFER SWITCH

Manufacturer		Cummins		
Model		QSK 23-63		
	L	23,150		
	"	170 X 170		
		16,0:1		
fl # t	"# "	1800		
fl "t	L	103,00		
	L	120,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	68,00		
	' # "	183,00		
	° C	514,00		
		24 V d.c.		
	Load	%\$ \$i	'+) i) \$i
	# "			
		189,00	139,00	97,00

		Stamford
		HCI 634H
	Hz	60
	"	900,00
7 cg'		0,80
		3
fl t		480/277
	A	1353,00
Temperature		H

		fl "t		fl "t	
	"	"	"	"	L
AC 820-6	6100,00	4121,00	1705,00	2253,00	1500,00
		fl "t		fl "t	
	"	"	"	"	L
AK 90	9450	6500	2200	2353	850

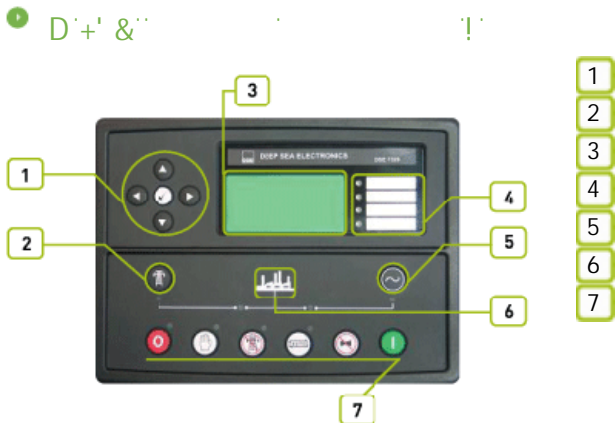

1

'8G9ž ' + &\$ž) 5ž&&\$#&(\$

1

1

1

'8G9'+' &\$ ž fi
&&\$ ž
"8G9'+' &\$
'8G9'+' &\$ ž
% &I '* (ž
žFG&' &žFG(,) ž
ž



f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '*\$-\$)'\$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

#



ž

%, !&*(

)
&(\$)

ž

ž


GA 8

!&+""

ž

AC 820-6

Cummins
Stamford
D+ & "

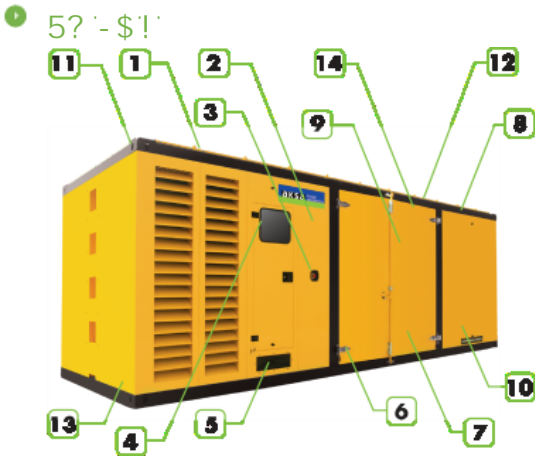

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the right side of the generator set
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2200
fl "L	"	6500
fl "L	"	2353
	L	850