



<b>ISO8528</b>	GC ; ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

<b>2000/14/EC</b>	& \$\$\$ # ( #
	z * \$ z ' z ' D :

	"	kw	"	kw	Amp
480/277		270,00		253,00	380,00
380/220		265,00		240,00	456,00
208/120		270,00		250,00	867,00

Standard Specifications

ALTERNATOR

D: A Ž 5JF

TRANSFER SWITCH

Manufacturer		Doosan		
Model		P126TI		
		% \$ \$	"# "	
		298,00 kw [400,00HP]		
	L	11,050		
	"	123x155		
		17,1:1		
	fl # ı	"# "	1800	
	fl ı	L	23,00	
		L	52,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	27,68		
	' # "	67,30		
	° C	540,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı	) \$ı
	# "			
		70,30	52,30	36,20

		Mecc Alte		
		ECO38 2LN/4		
	Hz	60		
	kw	288,00		
7 cg'		0,80		
		3		
	fl ı	480/277		
	A	433,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AD 270-6	2350,00	3017,00	1300,00	1588,00	470,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	3025	3960	1356	2097	470





f@z@Bl  
f@z@Bl

"z" "z" "z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '\*\$-\$)'\$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

#



ž

%, !&\*(

ž  
&(\$)

ž

ž


GA 8

!&+""

ž

# AD 270-6

Doosan  
Mecc Alte  
D+ &''

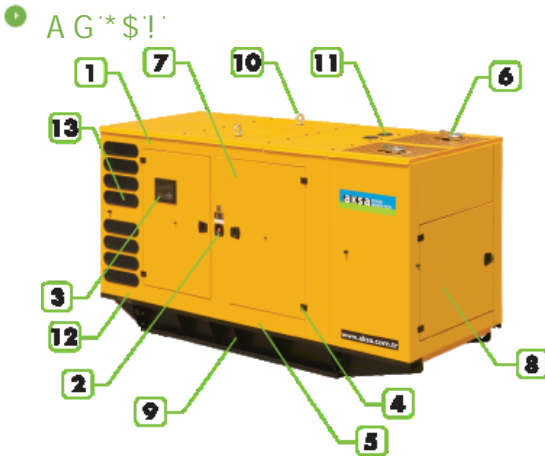

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470