



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
 z* \$ z' z' D:

	kw		kw	Amp
480/277	265,00		240,00	361,00
380/220	220,00		200,00	380,00
208/120	255,00		232,00	805,00

Standard Specifications

ALTERNATOR

D; A Ž 5JF


TRANSFER SWITCH

Manufacturer		Doosan		
Model		P126TI		
		% \$ \$	"# "	
		298,00 kw [400,00HP]		
	L	11,050		
	"	123x155		
		17,1:1		
	fl # ı	"# "	1800	
	L	23,00		
	L	52,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	27,68		
	' # "	67,30		
	° C	540,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "			
		70,30	52,30	36,20

		Mecc Alte		
		ECO38 1LN/4		
	Hz	60		
	kw	240,00		
7 cg'		0,80		
		3		
	fl ı	480/277		
	A	361,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AD 265-6	2265,00	3017,00	1300,00	1588,00	470,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	2940	3960	1356	2097	470

1 D+' &'

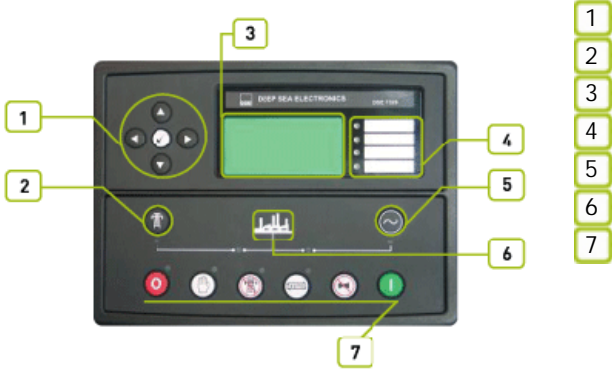

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

'8G9+' &\$
&&\$' ž

"'8G9+' &\$

'8G9+' &\$

% &1 '*('

žFG&' &žFG(,) ž

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AD 265-6

Doosan
Mecc Alte
D+ &''

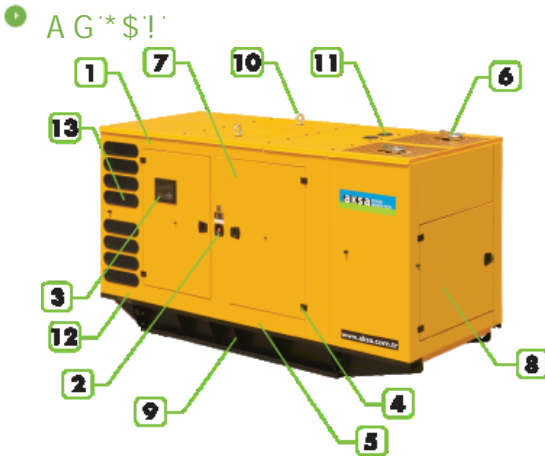

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470