



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
 z* \$ z' z' D:

	"	"	"	"	Amp
480/277		310,00		279,00	420,00
380/220		310,00		277,00	961,00
208/120		310,00		275,00	954,00

fP GDE GC ;) &
 fDF DE % \$! % % & GC " \$ (* z & GC

Standard Specifications

z
 fi ! E
 z
 z

ALTERNATOR


D; A Z 5JF

fi E
 fi " E
 fi " \$ E
TRANSFER SWITCH

Manufacturer	Doosan		
Model	P126TI-II		
	L	11,050	
	"	123x155	
		17.1:1	
fl # Ł	"# "	1800	
fl "Ł	L	23,00	
	L	52,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	30,22	
	' # "	64,20	
	° C	580,00	
		24 V d.c.	
	Load	%"\$Œı	'+)ı
	# ")\$ı	
		73,80	56,00 37,00

	Stamford	
	HCI444D	
	Hz	60
	"	300,00
7 cg'		0,80
		3
fl Ł		480/277
	A	496,00
Temperature		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
AD 310-6	2635,00	3017,00	1300,00	1588,00	470,00
		fl "Ł		fl "Ł	
	"	"	"	"	L
MS 60	3325	3960	1356	2097	470

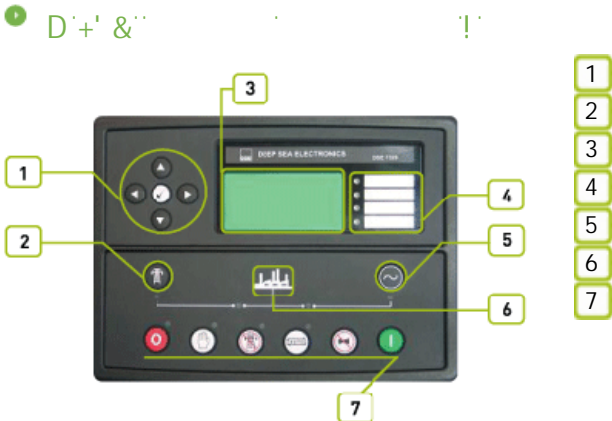

f@z@Bl
f@z@Bl

"z" "z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

)
&(\$)


ž

ž

ž

AD 310-6

Doosan
Stamford
D+ & "

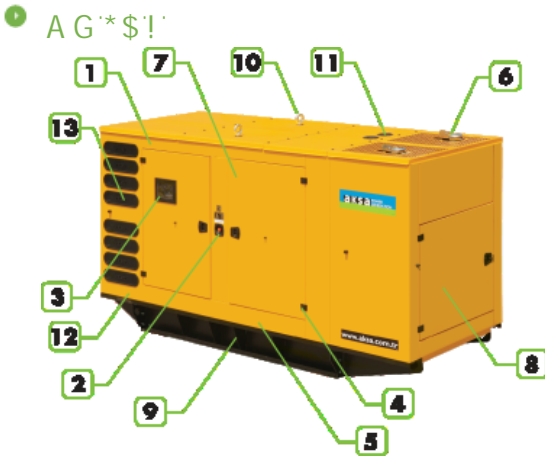

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470