



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

& \$\$\$ # (#

z * \$ z ' z ' D:

	"	kw	"	kw	Amp
480/277		624,00		570,00	862,00
380/220		593,00		539,00	1024,00
208/120		625,00		571,00	1981,00

Standard Specifications

Standard Specifications

Standard Specifications

ALTERNATOR

D: A Z 5JF


TRANSFER SWITCH

Manufacturer	Doosan		
Model	P2221E-S		
		% \$ \$	"# "
		682,00 kw [915,00HP]	
	L	21,930	
	"	128x142	
		14.6:1	
	fl # ı	"# "	1800
	L	40,00	
	L	114,20	
AbsorbedAirDischargeReSourceKey.Text	' # "	49,80	
	' # "	129,40	
	° C	548,00	
		24 V d.c.	
	Load	% \$ \$ı	'+)ı
	# ") \$ı	
		151,60	112,30 76,00

	Stamford	
	HCI544F	
	Hz	60
	kw	660,00
7 cg		0,80
		3
	fl ı	480/277
	A	992,00
Temperature		H

		fl ı		fl ı	
	"	"	"	"	L
AD 625-6	4220,00	3470,00	1550,00	2084,00	1000,00
		fl ı		fl ı	
	"	"	"	"	L
MS 85	5770	5297	1606	2656	1000

1 D+ &

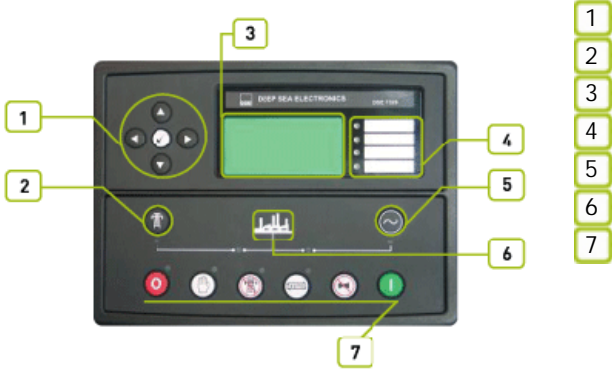

2

8G9ž + &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$
&&\$' ž

8G9+' &\$

8G9+' &\$

% &1 * (

žFG&' &žFG(,) ž

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-\$)

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AD 625-6

Doosan
Stamford
D+ & "

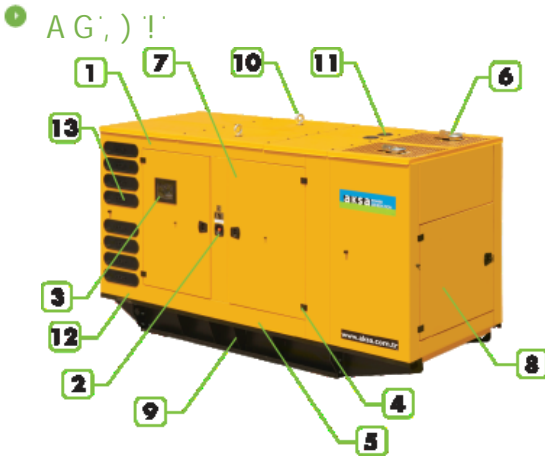

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000