



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC
 &\$\$\$#(#
 z*\$ z'z' D:

	kw		kw	Amp
480/277	315,00		275,00	413,00
380/220	315,00		275,00	522,00
208/120	315,00		275,00	954,00

fP GDE GC,) &
 fDF DE % \$i % % & GC " \$(* z & GC

Standard Specifications
 z
 fl ! E
 z
 z


ALTERNATOR
 D; A Z'5JF
 fl E
 fl " E
 fl " \$ E
TRANSFER SWITCH
 fl

Manufacturer		Cummins		
Model		QSL 9-G5		
		%	\$	#
		355,00 kw [476,00HP]		
	L	8,800		
	"	114 X 145		
		16.8:1		
	fl # ı	"#	"	1800
	fl ı	L	26,50	
		L	28,60	
AbsorbedAirDischargeReSourceKey.Text	' # "	24,60		
	' # "	65,10		
	° C	580,00		
		24 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "	75,00	55,00	36,00

		Stamford		
		HCI 444E		
	Hz	60		
	kw	352,00		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	529,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 315-6	2749,00	2811,00	1300,00	1869,00	470,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	3570	3960	1356	2097	470

1 D+' &'

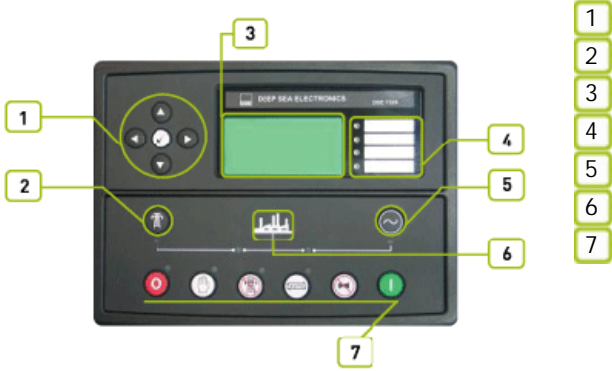

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž
&&\$ž ž

8G9+' &\$ž

8G9+' &\$ž

% &1 *('

žFG&' &žFG(,) ž

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 315-6

Cummins
Stamford
D+ & "

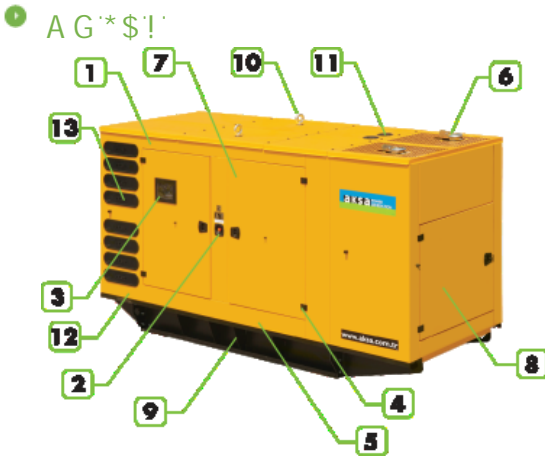

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470