

ISO8528

GC,) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	kw	"	kw	Amp
480/277		290,00		263,00	395,00
380/220		290,00		263,00	500,00
208/120		290,00		263,00	912,00

fPGE

GC,) &

) & z

fDF DE

%\$i

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fi

!

E

z

z

ALTERNATOR

D; A Z'5JF


TRANSFER SWITCH

Manufacturer		Cummins		
Model		NT855-G6		
		%	\$\$	"# "
		325,00 kw [435,00HP]		
	L	14,000		
	"	140x152		
		14,0:1		
	fl # t	"# "	1800	
	L	38,60		
	L	66,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	24,40		
	' # "	68,00		
	° C	524,00		
		24 V d.c.		
	Load	\$\$	+) I) \$I
	# "	74,00	56,00	40,00

		Stamford	
		HCI444E	
	Hz	60	
	kw	352,00	
7 cg		0,80	
		3	
	fl t	480/277	
	A	529,00	
Temperature		H	

		fl t		fl t	
	"	"	"	"	L
AC 290-6	3130,00	3058,00	1550,00	2071,00	700,00
		fl t		fl t	
	"	"	"	"	L
MS 70	4200	4460	1606	2477	700

1 D+' &'

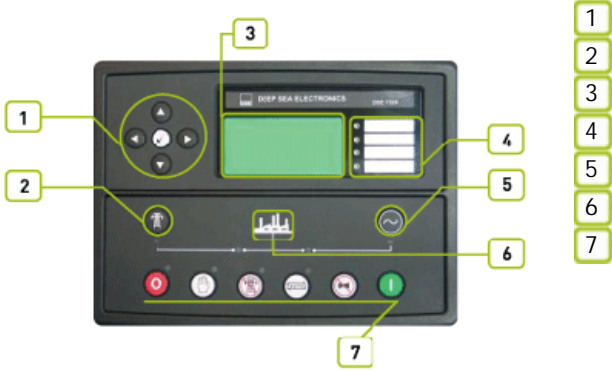

2

"8G9ž + ' &\$ž) 5ž&&\$#(\$

3

4

5

"8G9+' &\$' &&\$' ž

"8G9+' &\$' '8G9+' &\$'

ž

% &1 *(žFG&' &žFG(,) ž

ž

f@z@Bl
f@!@!@t

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700