

AC 920-6

Cummins
Stamford
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	kw	"	kw	Amp
480/277		920,00		831,00	1249,00
380/220		825,00		750,00	1425,00
208/120		900,00		820,00	2845,00

fPQDE

GC ;) &

) & z

fDF DE

%\$!

%

%&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

!


z

Manufacturer		Cummins		
Model		QST 30-G3		
		%	\$\$	"# "
		1007,00 kw [1350,00HP]		
	L	30,480		
	"	140 X 165		
		14:1		
	fl # ı	"# "	1800	
	L	154,00		
	L	224,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	76,20		
	' # "	197,00		
	° C	481,00		
		24 V d.c.		
	Load	%)\$ı	'+)ı)\$ı
	# "	207,00	154,00	106,00

		Stamford		
		HCI 634H		
	Hz	60		
	kw	900,00		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	1353,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 920-6	7200,00	4400,00	1176,00	2341,00	1500,00
		fl ı		fl ı	
	"	"	"	"	L
AK 96	10800	7500	2300	3170	1500

1 D+' &'

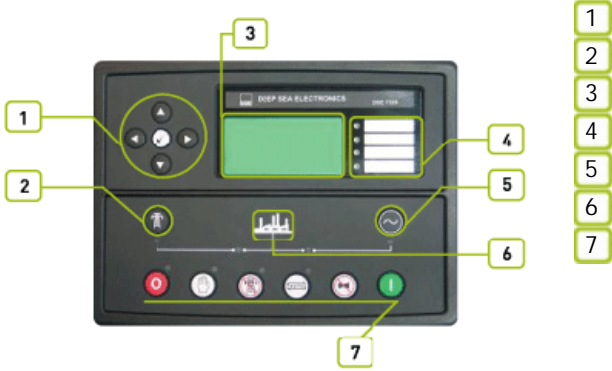

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž &&\$ ž ž

8G9+' &\$ ž 8G9+' &\$ ž

% &1 *(ž

žFG&' &žFG(,) ž

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '*\$-\$)'\$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+''

%, !&*(

&(\$)


ž

ž

ž

AC 920-6

Cummins
Stamford
D+ & "

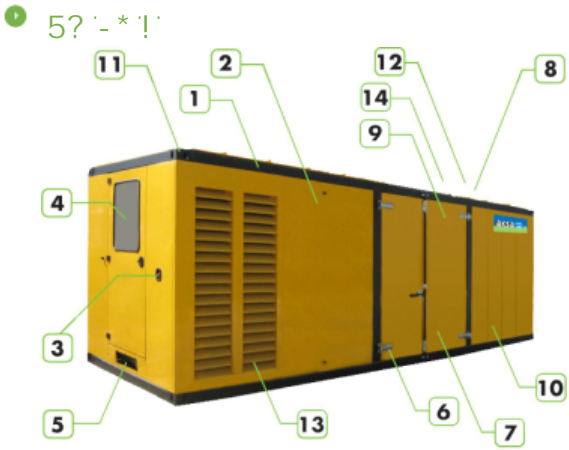

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	3170
	L	1500