

# AC 600-6

Cummins  
Stamford  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

2000/14/EC  
 &\$\$#( #  
 z\*\$ z'z' D:

	"	kw	"	kw	Amp
480/277		600,00		545,00	819,00
380/220		595,00		545,00	1024,00
208/120		600,00		545,00	1891,00

fPGLD GC, ) &  
 fDF DL %s1 % %& GC "\$\* z&( GC

Standard Specifications

z  
 fl ! E  
 z  
 z

ALTERNATOR

D; A Z'5JF


fl E  
 fl " E  
 fl " \$ E  
 TRANSFER SWITCH

Manufacturer		Cummins		
Model		VTA 28-G5		
		%	\$	#
		671,00 kw [900,00HP]		
	L	28,000		
	"	140 X 152		
		13,1:1		
	fl # ı	"#	"	1800
	fl ı	L	83,00	
		L	170,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	64,60		
	' # "	143,00		
	° C	502,00		
		24 V d.c.		
	Load	%\$ı	'+)ı	)\$ı
	# "			
		154,00	118,00	84,00

		Stamford		
		HCI 544 F		
	Hz	60		
	kw	660,00		
7cg		0,80		
		3		
	fl ı	480/277		
	A	992,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 600-6	5570,00	3814,00	1550,00	2266,00	1000,00
		fl ı		fl ı	
	"	"	"	"	L
MS 85	7130	5297	1606	2656	1000

1 D+' &'

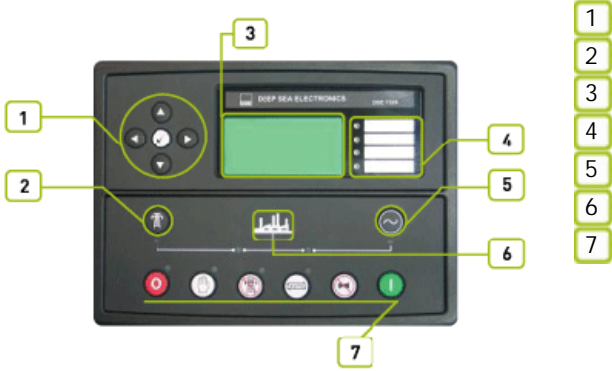

2

8G9ž + &\$ž ) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž "8G9+' &\$ž '8G9+' &\$ž ž " % &1 '\*(' " žFG&' &žFG(,) ž



f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '\*\$-) \$

6G'9B '\*\$\$\$!\*!&

6G'9B '\*\$\$\$!\*!(

#



ž

%, !&\*(

)  
&(\$)

ž

ž


GA 8

!&+""

ž

# AC 600-6

Cummins  
Stamford  
D+ & "

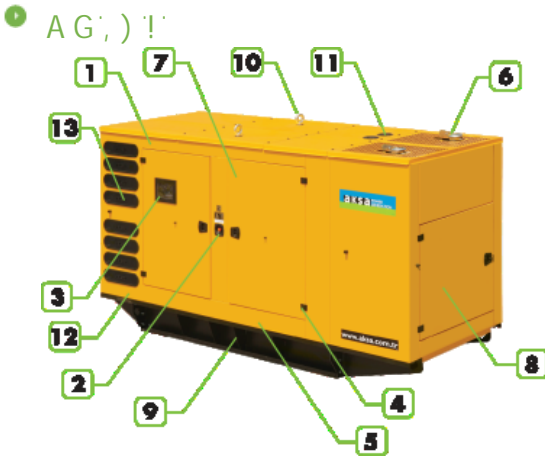

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000