

AC 2000-6

Cummins
Stamford
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z*\$ z'z' D:

	"	kw	"	kw	Amp
480/277		2000,00		1815,00	2729,00
380/220		1885,00		1714,00	3255,00
208/120					

fPQDE

GC ;) &

) & z

fDF DE

%\$1

%

%&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

1

!
!
!

ALTERNATOR

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

TRANSFER SWITCH

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!

!
!
!


!
!
!

Manufacturer		Cummins		
Model		QSK 60-G6		
		% \$ \$	#	"
		2180,00 kw [2922,00HP]		
	L	60,200		
	"	159 X 190		
		14,5:1		
	fl # ı	"#	"	1800
	fl ı	L	280,00	
		L	682,00	
AbsorbedAirDischargeReSourceKey.Text	' #	"	171,60	
	' #	"	439,00	
	° C	475,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	#	"		
		466,00	356,00	247,00

		Stamford		
		PI 734F		
	Hz	60		
	kw	2080,00		
7cg		0,80		
		3		
	fl ı	480/277		
	A	3127,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 2000-6	15500,00	5710,00	2280,00	3220,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 99	TBD	9000	2800	3300/4800	2200

1 D+' &'

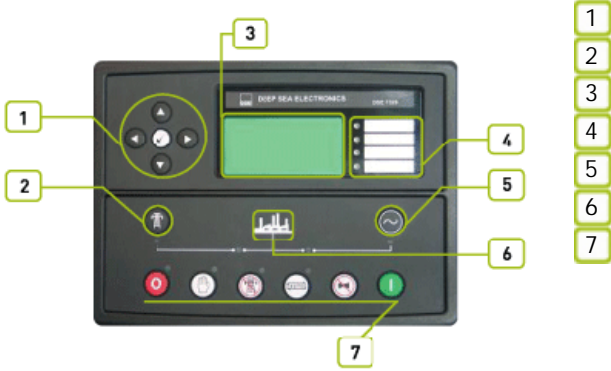

1

"8G9ž +' &\$ž) 5ž&&\$#(\$'

1

1

1

'8G9+' &\$' fi
'&&\$' ž

"'8G9+' &\$'
'8G9+' &\$'
ž

% &1 '*(' "
žFG&' &žFG(,) ž

ž



f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '*\$-) \$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

#



ž

%, !&*(

)
&(\$)


ž

ž

GA 8

!&+""

ž

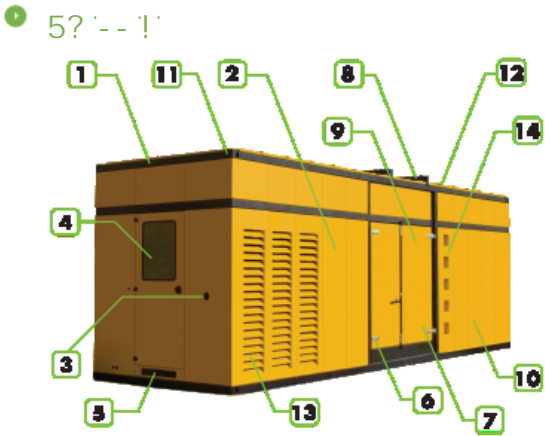

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5 generator set
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13 the canopy.
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200