

ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z\*\$ z'z' D:

	"	kw	"	kw	Amp
480/277		496,00		446,00	671,00
380/220		462,00		420,00	798,00
208/120		494,00		443,00	1537,00

fPQDE

GC ; ) &

) & z

fDF DE

%\$1

%

%&

GC " \$(\*\*

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR

D; A Z'5JF

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

TRANSFER SWITCH

!

!

!

!

!


!

Manufacturer		Cummins		
Model		KTA 19-G4		
		%	\$\$	"# "
		563,00 kw [755,00HP]		
	L	18,900		
	"	159 X 159		
		13,9:1		
	fl # ı	"# "	1800	
	L	50,00		
	L	120,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	43,00		
	' # "	112,00		
	° C	504,00		
		24 V d.c.		
	Load	%%\$ı	'+)ı	)\$ı
	# "	122,00	94,00	65,00

		Stamford		
		HCI 544 D		
	Hz	60		
	kw	515,00		
7cg		0,80		
		3		
	fl ı	480/277		
	A	774,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 496-6	4520,00	3344,00	1550,00	2196,00	850,00
		fl ı		fl ı	
	"	"	"	"	L
MS 80	TBD	4810	1606	2615	850

1 D+' &'

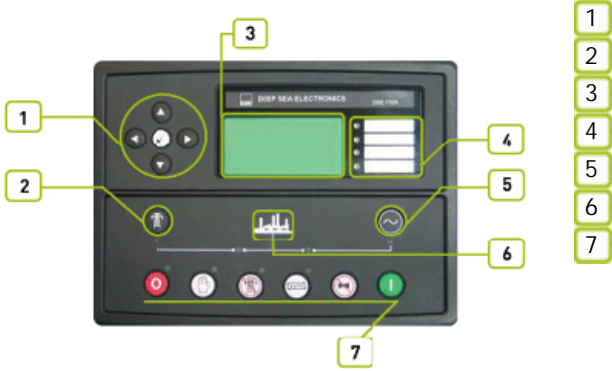

2

"8G9ž + ' &\$ž ) 5ž&&\$#(\$

3

4

5

'8G9+' &\$  
&&\$' ž

"'8G9+' &\$

'8G9+' &\$

% &1 '\*('

žFG&' &žFG(,) ž



f@#@Bl  
f@#@!@t

"z" "z"

f@#@Bl

971

#

#

#

#



f&)(, t  
f&%) +t  
f&% \$t

6G'9B '\*\$-) \$  
6G'9B '\*\$\$\$!\*!&  
6G'9B '\*\$\$\$!\*!(

#



GA 8  
% , !&\* ( )  
&(\$) Ž Ž !&+"" Ž

# AC 496-6

Cummins  
Stamford  
D+ & "



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850